

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

3629-0102P

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/19/99 6055

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/00602

February 3, 2000

March 8, 1999

TITLE OF INVENTION

DATA REPRODUCING APPARATUS, DATA REPRODUCING METHOD AND INFORMATION TERMINAL

APPLICANT(S) FOR DO/EO/US

MAJIMA, Yoshiyuki; KATAYAMA, Shinobu; MINAMI, Hideaki

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau. WO 00/54249
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is transmitted herewith.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4)
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). **(Original)**
10. ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 20. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98 PTO-1449 and International Search Report (PCT/ISA/210) with 21 document.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☒ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:
  - 1.) PCT Substitute Claims Letter w/amendments
  - 2.) TWENTY-EIGHT (28) sheets Formal Drawings

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <div style="font-size: 1.2em; font-weight: bold; margin-top: 5px;">092936055</div>		INTERNATIONAL APPLICATION NO. PCT/JP00/00602		ATTORNEY'S DOCKET NUMBER 3629-0102P	
---	--	---	--	--	--

21. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. .... <b>\$1,000.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. .... <b>\$860.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. .... <b>\$710.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4). .... <b>\$690.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). .... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>	<b>CALCULATIONS</b> <b>PTO USE ONLY</b>           <div style="display: flex; justify-content: space-between; border-top: 1px solid black; border-bottom: 1px solid black;"> <span>\$</span> <span>860.00</span> </div>				
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(c)).			<div style="display: flex; justify-content: space-between; border-top: 1px solid black; border-bottom: 1px solid black;"> <span>\$</span> <span>0</span> </div>		
<input checked="" type="checkbox"/> CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	24 - 20 =	4	X \$18.00	\$	72.00
Independent Claims	5 - 3 =	2	X \$80.00	\$	160.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable) Yes			+ \$270.00	\$	270.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	<b>1362.00</b>
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	0
<b>SUBTOTAL =</b>				\$	<b>1362.00</b>
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	0
<b>TOTAL NATIONAL FEE =</b>				\$	<b>1362.00</b>
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$	40.00
<b>TOTAL FEES ENCLOSED =</b>				\$	<b>1402.00</b>
				Amount to be:	\$
				refunded	
				charged	\$

a. ☒ A check in the amount of \$ **1402.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account. No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
 overpayment to Deposit Account No. **02-2448**.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR  
 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Send all correspondence to:  
**Birch, Stewart, Kolach & Birch, LLP or Customer No. 2292**  
**P.O. Box 747**  
**Falls Church, VA 22040-0747**  
**(703)205-8000**

**Date:** September 7, 2001

By   
 Michael K. Mutter, #29,680

09/936055

07 SEP 2001

PATENT  
3629-0102P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: MAJIMA, Yoshiyuki et al Conf.:  
Int'l. Appl. No.: PCT/JP00/00602  
Appl. No.: NEW Group:  
Filed: September 7, 2001 Examiner:  
For: DATA REPRODUCING APPARATUS, DATA  
REPRODUCING METHOD AND INFORMATION  
TERMINAL

PRELIMINARY AMENDMENT

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents  
Washington, DC 20231

September 7, 2001

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

IN THE SPECIFICATION:

Please amend the specification as follows:

Before line 1, insert --This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/JP00/00602 which has an International filing date of February 3, 2000, which designated the United States of America.

REMARKS

The specification has been amended to provide cross-referencing to the International Application.

Entry of the above amendments is earnestly solicited. An early and favorable first action on the merits is earnestly solicited.

Attached hereto is a marked-up version showing the changes made to the application by this amendment.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 

Michael K. Mutter, # 29,680

P.O. Box 747

Falls Church, VA 22040-0747

(703) 205-8000

MKM/tf

3629-0102P

28/ppts

JC12 Rec'd PCT/PTO 07 SEP 2001

## DESCRIPTION

## TITLE OF THE INVENTION

DATA REPRODUCING APPARATUS, DATA REPRODUCING METHOD AND  
INFORMATION TERMINAL

## TECHNICAL FIELD

The present invention relates to a data reproducing apparatus, data reproducing method and information terminal used in reproducing the data different in attribute, such as sound and images.

## BACKGROUND OF THE INVENTION

Various ones of information are supplied through the network due to the development of multimedia. These of information include, representatively, sound, text or images. For instance, in communications karaoke taken as an example, music titles and words are text information, accompaniment melodies and back choruses are sound information, and background motion pictures are image information.

In communications karaoke, these various kinds of information are simultaneously distributed through the network so that each of information is reproduced on the terminal unit. By providing synchronization mutually between these of information, character color of words is varied or motion

0936055.090701

picture is varied in the progress of music.

Conventionally, in order to provide synchronization, clocks have been provided in the respective programs for processing each of the information of sound, text and images, whereby the synchronizing process has been made according to the time information of clocks. Due to this, where the system load is increased or so, there is possible mutual disagreement between the clocks to thereby causing so-called synchronizing deviation and hence deviated timing of outputting each of information. Thus, there has been the occurrence of such troubles as disagreement in between sound and images.

Meanwhile, the data of sound, text, images or the like is read out by accessing, every time, a file according to a command thus requiring time in processing. Furthermore, because the files have been separately prepared on an each-data basis, there also has been a problem of troublesome file management.

#### DISCLOSURE OF THE INVENTION

Therefore, it is an object of the present invention to provide a data reproducing apparatus and data reproducing method capable of easily providing synchronization upon reproducing various kinds of information different in attribute.

Another object of the invention is to provide a data

0936055-090701

reproducing apparatus easy in file management without the necessity of preparing files on a kind-by-kind basis of data.

Another object of the invention is to provide a data reproducing apparatus capable of easily burying arbitrary information, such as sound, text and images, in an existing data format.

Another object of the invention is to provide a data reproducing apparatus adapted for communications karaoke.

Another object of the invention is to provide a data reproducing apparatus capable of obtaining music play full in realism feeling.

Another object of the invention is to provide a data reproducing method capable of reducing the transfer amount of data in the case of repetitively reproducing data.

Another object of the invention is to provide a data reproducing method satisfactorily having a small capacity of a communication line.

Another object of the invention is to provide a data reproducing method capable of further reducing the data amount of reproduced data.

Another object of the invention is to provide a data reproducing method capable of suppressing noise occurrence during data reproducing.

Another object of the invention is to provide a data reproducing apparatus and data reproducing method capable of

0936055-090701

processing data at high speed.

Another object of the invention is to provide a data reproducing apparatus capable of stably reproducing data regardless of capacity variation on the transmission line.

Another object of the invention is to provide an information terminal capable of downloading various kinds of information different in attribute, such as sound, text and images, and reproducing these for output as sound or visible information.

Another object of the invention is to provide an information terminal capable of carrying out a proper process for interrupt signals in the information terminal having a function of a phone or game machine.

Another object of the invention is to provide an information terminal capable of downloading and making use of music, words and jacket picture data on CD (Compact Disk) or MD (Mini Disk).

Another object of the invention is to provide an information terminal capable of making use of each of downloaded data by storage to a small-sized information storage medium.

Another object of the invention is to provide a data reproducing apparatus that, where receiving to view commercial information, the service by the commercial provider is available.

093605 090701



In the present invention, MIDI is an abbreviation of Musical Instrument Digital Interface, that is an International Standard for mutual communications with signals of music play between the electronic musical instruments or between the electronic musical instrument and the computer. Meanwhile, SMF is an abbreviation of Standard MIDI File, that is a standard file format comprising time information called delta time and event information representative of music play content or the like. It should be noted that the terms "MIDI" and "SMF" in the present Specification are used in the above meanings.

In the invention, the data to be received includes event information and time information an event is to be executed, and comprises data in a format of SMF or the like. The received data is assorted on a kind-by-kind basis depending upon respective ones of time information so that an event of assorted data is executed to reproduce the data.

In the invention, because the time information and the information of sound, text, images and the like are integral, the time information can be utilized as synchronizing information by reproducing various kinds of data according to the time information possessed by them. As a result, it is possible to easily provide synchronization to between different kinds of data as in sound and images. Also, there is no need to separately prepare and manage files on a kind-by-kind basis of data, thus facilitating file management.

0936055.090701

Furthermore, there is no necessity to access various kinds of files every time, thereby increasing the speed of processing.

The reception data can be configured with first data having MIDI event information and second data having event information of other than MIDI. The second data can be considered, for example, the data concerning text, images, audio or the like.

The MIDI event is a gathering of the commands for controlling tone generation of the musical instrument. For example, instruction command forms are taken as "Start Tone Generation of Do" "Stop Tone Generation of Do". Also, the MIDI event is to be added with a delta time as time information and turned into an SMF-formatted data so that such an event as "Tone Generation Start of Do" "Tone Generation Stop of Do" is executed when a predetermined time comes according to a time represented by the delta time.

On the other hand, the other events than MIDI include a META event or a system exclusive event. These events can be extended in format as hereinafter referred so that various kinds of data can be buried in the extended format. The use of such an SMF extended format can easily record various kinds of data, such as sound and images without major modification to the format.

The present invention receives the data having each of event information of MIDI, text and images to output reproduced

0936055.090701  
T02060.55093660

MIDI data as sound and reproduced text and image data as visible information, thereby making possible to realize a data reproducing apparatus suited for karaoke. In this case, the addition of voice besides MIDI as audio makes it possible to reproduce a musical-instrument playing part in MIDI and a vocal part such as back chorus in voice, thus realizing music play full in realism feeling.

In the case of repetitively reproducing the second data having event information other than MIDI, it is preferred to previously store first-received data to a memory so that, when repetitively reproduce the data, only the time information concerning reproducing is transmitted by the second data. By doing so, the transfer amount of data can be decreased.

Also, in the case of reproducing the second data following the first data, it is preferred to divide the reproduced data in the second data into a plurality of data, to transmit a data group having the plurality of divisional data inserted between the preceding ones of first data, to extract the inserted divisional data from the data group at the reception side, and to combine the extracted divisional data into reproduced data. This smoothen the amount of transmission data and satisfactorily makes the communication line with small capacity. In this case, the extracted divisional data is sequentially stored to the memory in a chronological fashion and the area in which divisional data is stored is recorded by

09938055.090701

a start address of the following divisional data to which the relevant divisional data is coupled, thereby easily, positively combining together the divisional ones of data.

Furthermore, by cutting away the silence sections of the reproduced data to be recorded to the second data, the data amount can be reduced furthermore. In this case, it is preferred to carry out a fade-in/out process to a signal in the vicinity of a rise portion and fall portion of the reproduced data in view of suppressing noise occurrence.

In another embodiment of a data reproducing apparatus of the invention, each of data different in attribute is assorted, for each unit section, and stored to a storage section depending upon the time information thereof, sequentially being read out of the storage section and reproduced in the next unit section. With this, because the process of received data is made in a pipeline form, processing is possible at higher speed. Also, time synchronization can be easily provided by managing data time information and unit-section time width to forward only the data to be processed in the relevant unit section to the storage section.

The data reproducing apparatus according to the invention can adopt a stream scheme that data is reproduced while being downloaded. In this case, if the amount of data being consumed by reproducing exceeds the amount of data being taken, there arise data insufficiency and discontinuity in

093605.093701

sound, images or the like. Accordingly, by caching data to a required amount to thereafter start reproducing, data can be continuously reproduced without encountering discontinuity.

The data reproducing apparatus according to the invention can be mounted on an information terminal such as cellular phone or game machine, wherein various kinds of data can be downloaded from a server by making use of a terminal communicating function. By providing a speaker for outputting sound or display for displaying text and images to the information terminal, music or images can be heard or viewed on the terminal. In the case of a phone, it is preferred to output an incoming tone by prohibiting sound from being outputted from the speaker upon receiving an incoming signal. In the case of a game machine, an effect sound due to MIDI can also be outputted together with sound from the speaker.

A small-sized information storage medium can be removably provided on the data reproducing apparatus according to the invention, whereby various kinds of downloaded data can be stored, for reutilization, in the information storage medium. For example, if downloading music data in MIDI or audio, music words or commentary data in text and jacket picture data in images respectively, the information storage medium itself can be utilized as CD or MD.

In the invention, by previously including an Internet URL and the information concerning service to be offered in the URL

09936055.090701

in commercial-information text data to be received and then causing jump to a homepage of the URL following the reproducing of commercial, various services can be offered to the commercial viewers.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing an example of a data reproducing apparatus of the present invention.

Fig. 2 is a figure showing a format of SMF-formatted reception data.

Fig. 3 is a format example of the data concerning MIDI.

Fig. 4 is a format example of the data concerning simplified-formed MIDI.

Fig. 5 is a format example of the data concerning audio, text and images.

Fig. 6 is a format example of a META event concerning control.

Fig. 7 is another format example of the data concerning audio, text and images.

Fig. 8 is a format example of a data row.

Fig. 9 is a flowchart showing an example of a data reproducing method according to the invention.

Fig. 10 is a flowchart showing another example of a data reproducing method according to the invention.

Fig. 11 is a figure explaining a repetitive reproducing

0936055.091701

process of data.

Fig. 12 is a flowchart of the repetitive reproducing process.

Fig. 13 is a figure showing the principle of previous forwarding of data.

Fig. 14 is a figure showing an insertion example of divisional data.

Fig. 15 is a figure showing the content of a memory storing divisional data.

Fig. 16 is a flowchart in the case of storing divisional data to a memory.

Fig. 17 is a waveform diagram of audio data having a silent section.

Fig. 18 is a flowchart showing a process of silence sections.

Fig. 19 is a block diagram showing another example of a data reproducing apparatus of the invention.

Fig. 20 is a flowchart showing another example of a data reproducing method of the invention.

Fig. 21 is a figure explaining the principle of time operation in data assortment.

Fig. 22 is a flowchart showing a procedure of data assortment.

Fig. 23 is a flowchart showing the operation of each data reproducing section.

0936055.090701

Fig. 24 is a time chart of a data process overall.

Fig. 25 is a figure explaining the operation of data reception in a stream scheme.

Fig. 26 is a time chart of data reception.

Fig. 27 is a time chart explaining data cache.

Fig. 28 is a block diagram showing another example of a data reproducing apparatus of the invention.

Fig. 29 is a time chart showing the operation of the apparatus of Fig. 28.

Fig. 30 is a block diagram showing another example of a data reproducing apparatus of the invention.

Fig. 31 is a time chart showing the operation of the apparatus of Fig. 30.

Fig. 32 is a flowchart in the case of implementing a charge discount process using the data reproducing apparatus of the invention.

Fig. 33 is a figure chronologically showing each of data configuring CM.

Fig. 34 is an example of a tag to be added to text data.

Fig. 35 is a flowchart in the case of implementing the service with an available period using the data reproducing apparatus of the invention.

Fig. 36 is an example of a tag to be added to text data.

Fig. 37 is a figure showing a cellular phone mounted with the data reproducing apparatus of the invention.

09936055-090701



Fig. 38 is a table figure of a memory built in an information storage medium.

Fig. 39 is a figure showing a system using a cellular phone.

#### BEST MODE FOR CARRYING OUT THE INVENTION

An example of a data reproducing apparatus is shown in Fig. 1. In Fig. 1, 1a, 1b is a file on which data is recorded, wherein 1a is for example a file existing in a server on the Internet, and 1b is for example a file on a hard disk within the apparatus.

2 is a CPU for controlling the data reproducing apparatus overall, and structured including a data receiving section 3 and a data assorting section 4. Although besides these the CPU 2 includes blocks having various functions, those in the present invention are not in direct relation and hence omittedly shown. The data receiving section 3 has access to the file 1a, 1b to receive the data stored therein. The data in the file 1a is received, through a wire or wirelessly. These of received data are temporarily stored to a buffer 3a. The data assorting section 4 assorts the data received by the data receiving section 3, into a data reproducing section 6 on a kind-by-kind basis.

The data reproducing section 6 is configured with a MIDI reproducing section 11 to reproduce the data concerning MIDI,

an audio reproducing section 12 to reproduce the data concerning audio, a text reproducing section 13 concerning a text and an image reproducing section 14 to reproduce the data concerning an image. The MIDI reproducing section 11 has a sound-source ROM 11a storing the sound-source data of various musical instruments used for the music to be reproduced. This sound-source ROM 11a can be replaced with a RAM and mounted with the built-in data replaced. The image reproducing section 14 has a function to reproduce still images and motion images.

15 is a mixer for mixing the outputs of the MIDI reproducing section 11 and audio reproducing section 12, and 16 is a mixer for mixing the outputs of the text reproducing section 13 and image reproducing section 14. The mixer 15 is provided with a sound effect section 15a to process for echo addition or the like, while the mixer 16 is provided with a visual effect section 16a to process a special effect addition to an image. 17 is an output buffer for temporarily storing the output of the mixer 15, and 18 is an output buffer for temporarily storing the output of the mixer 16. 19 is a speaker as a sound generating section for outputting sound depending on the data of the output buffer 17, and 20 is a display for displaying visible information of characters, illustrations or the like on the basis of the data of the output buffer 18.

To the data receiving section 3 is inputted the SMF-formatted data recorded in the files 1a, 1b is. The

SMF-formatted data generally comprises time information, called delta time, and event information representative of a music-play content or the like, and includes three types shown in Figs. 2(a)-(c) in accordance with a kind of event information. (a) is the data having the event information comprising a MIDI event, (b) is the data having the event information comprising a META event and (c) is the data having event information comprising a Sys. Ex event.

The detail of the MIDI event is shown in Fig. 3. Fig. 3(a) is the same as Fig. 2(a). The MIDI event comprises status information and data, as shown in Figs. 3 (b) and (c). Fig. 3(b) is an event of a tone-generation start command wherein the status information is recorded with a musical instrument kind, data 1 is with a scale and data 2 is with a tone intensity, respectively. Meanwhile, Fig. 3(c) is an event of a tone-generation stop command, wherein the status information is recorded with a musical instrument kind, data 3 is with a scale and data 4 is with a tone intensity, respectively. In this manner, the MIDI event is an event storing music-play information wherein one event configures a command, e.g. "Generate Tone Do With Piano Sound At this Intensity".

Fig. 4 shows an example of a simplified MIDI format reduced in data amount by simplifying the format of Fig. 3. Although Fig. 3 separately configures the tone start command and the tone stop command, whereas Fig. 4 integrates tone

09936085.090701

generation and stop into one by adding a tone-generating time in the data. Meanwhile, tone intensity data is omitted and scale data is included in the status information. Incidentally, although the format of Fig. 4 is not a standard format like an SMF, the data to be dealt with in the invention includes the other formats than the one like an SMF.

The detail of the META event is shown in Fig. 5. Fig. 5(a) is the same as Fig. 2(b). The MEAT event, an event for transferring data or controlling for reproduce start/stop, is allowed to extend the format so that a variety of data can be buried within the extended format. Figs. 5(b)-(e) show format examples of extended META events. (b) is a format buried with audio data, (c) a format buried with text data, (d) a format buried with image data and (e) a format buried with text data and image data, respectively. The image includes a motion image, besides a still image such as illustration and picture.

The FFh at the top is a header showing that this event is a META event. The next 30h, 31h, ... are identifiers representing that the format of the META event is an extended format. Meanwhile, len represents a data length of the META event, type a format of data to transfer, and id a data number, respectively. Event is to show an event content to be executed, and represented by a command, e.g. "Start Audio Data Transfer" or "End Image Data Transfer". The end point of such data can be known from a len value representative of a data length.

The META event includes a format concerning control besides the extended format recording the data as above. Fig. 6 is one example of the same, wherein (a) shows an event format for reproduce start and (b) for reproduce stop. 10h in (a) and 11h in (b) are, respectively, commands for reproduce start and reproduce stop. The other FFh, len, type and id are the same as Fig. 5, hence explanations being omitted.

The detail of the Sys. Ex event is shown in Fig. 7. Fig. 7(a) is the same as Fig. 2(c). The Sys. Ex event is called an exclusive event, e.g. an event concerning the set information for setting in a system adapted for the orchestra and the like. This Sys. Ex event is also possible to extend so that various kinds of data can be buried in the extended format. Figs. 7(b)-(e) show a format example of an extended Sys. Ex event, which is in a format similar to Fig. 5.

The SMF-formatted data is configured as above, these of which data are combined in numbers to constitute a series of data. Fig. 8 shows an example of such a data row. M is data concerning MIDI and has a format shown in Fig. 3. A is data concerning audio and has a format shown in Fig. 5(b). T is data concerning text and has a format shown in Fig. 5(c). P is data concerning an image and has a format shown in Fig. 5(d). Incidentally, the order of arrangement of each of data is not limited to Fig. 8 but there can exist a variety of patterns. Also, although in Fig. 8 the data of audio, text and images are

09936055.090701

described in a META event, these can be recorded in the Sys. Ex event. Each of data M, A, T, P is configured as a packet, these of which are chained into a series of data row. The data row is to be received by a data receiving section 3 of Fig. 1 and stored in the buffer 3a.

The received data is assorted in the data assorting section on the basis of a delta time  $\Delta T$  thereof, to execute an event in the data reproducing section 6 and reproduce the data. The timing an event is to be executed is determined by the delta time  $\Delta T$ . Namely, an event is executed when the relationship between a lapse time  $\Delta t$  from the immediately preceding event executed and a delta time  $\Delta T$  of an event to be currently executed is in  $\Delta t \geq \Delta T$ . Namely, if a certain event is executed, the lapse time from a start of the event is counted. When the lapse time is equal to a delta time of the next event or exceeds it (there is a case not exactly coincident with but exceeding a delta time because the time resolving power by the CPU is finite), the next event is executed. In this manner, the delta time is information representing to execute the current event depending on what amount of time elapses from the immediately preceding event. Although the delta time does not represent an absolute time, the time from a start of reproducing can be calculated by integrating the delta time.

Hereunder, explanation is made on the detail of reproducing in each section of the data reproducing section 6.

First, explained is the operation of reproducing in the MIDI reproducing section 11. In Fig. 1, the data assorting section 4 of the CPU 2 sequentially reads the received data out of the buffer 3a according to a program stored in a not-shown ROM. If the read-out data is data M concerning MIDI (Fig. 3), its event information is supplied to the MIDI reproducing section 11. If the event content is, for example, a command "Generate Tone Mi With Piano Sound", the MIDI reproducing section 11 decrypts this command to read a piano sound from the sound-source ROM 11a and creates a synthesizer sound by a software synthesizer thereby starting to generate a tone at a scale of mi. From then on, the CPU 2 counts a lapse time. If this lapse time is equal to the delta time attached to the next event "Stop Tone Generation of Mi" or exceeds it, this command is supplied to the MIDI reproducing section 11 so that the MIDI reproducing section 11 decrypts the command to cease the tone generation of mi. In this manner, the tone of mi is reproduced with a piano sound only in the duration of from a tone generation start to a tone generation stop.

Next, the CPU 2 counts a lapse time from a tone generation stop of mi. If this lapse time is equal to, for example, a delta time attached to the next event "Generate Tone Ra With Piano Sound" or exceeds it, this command is supplied to the MIDI reproducing section 11. The MIDI reproducing section 11 decrypts this command to read a piano sound from the

0936055-090701

sound-source ROM 11a and create a synthesizer sound thereby starting tone generation at a scale of ra. Then, from then on the CPU 2 counts a lapse time. If the lapse time is equal to a delta time attached to the next event "Stop Tone Generation of Ra" or exceeds it, this command is supplied to the MIDI reproducing section 11. The MIDI reproducing section 11 decrypts this command to stop the tone generation of ra. In this manner, the tone of ra is reproduced with a piano sound only in the duration of from the tone generation start to the tone generation stop. By the repetition of such an operation, the MIDI reproducing section 11 reproduce a sound according to MIDI.

Next, explanation is made on reproducing of the data having other event information than MIDI. As in the foregoing, each of data of an audio, text and image is recorded in a META event (Fig. 5) or Sys. Ex event (Fig. 7). In Fig. 1, the data assorting section 4 sequentially reads the received data from the buffer 3a, similarly to the above. In the case that the read-out data is data A concerning audio, the event information of the read-out data is assorted to the audio reproducing section 12 according to a delta time. The audio reproducing section 12 decrypts the content of the relevant event and executes the event, thus reproducing an audio. Where the read-out data is data T concerning a text, the event information of the read-out data is assorted to the text reproducing section



13 according to a delta time. The text reproducing section 13 decrypts the content of the relevant event and executes the event, thus reproducing a text. Where the read-out data is data P concerning an image, the event information of the read-out data is assorted to the image reproducing section 14 according to a delta time. The image reproducing section 14 decrypts the content of the relevant event and executes the event, thus reproducing an image.

More specifically, if the audio reproducing section 12 receives, for example, an event "Generate Sound B" from the data assorting section 4, the audio reproducing section 12 decodes and reproduces the data of a sound B added to the relevant event. From then on, the CPU 2 counts a lapse time. If the lapse time is equal to, for example, a delta time attached to the next event "Display Character C" or exceeds it, the text reproducing section 13 decodes and reproduces the data of a character C added to the relevant event. Next, the CPU 2 counts a lapse time from the reproducing of the character C. If the lapse time is equal to, for example, a delta time attached to the next event "Display Illustration D" or exceeds it, the image reproducing section 14 decodes and reproduces the data of an illustration D added to the relevant event. This, in this respect, is basically similar to the principle of the reproducing of MIDI data.

The above explanation was made, for purpose of

09936055.090701

convenience, separately between the reproduce operation by the MIDI reproducing section 11 and the reproduce operation by the other reproducing section 12 - 14 than MIDI. However, actually as shown also in Fig. 8 the data receiving section 3 is chronologically, mixedly inputted by data M having a MIDI event and data A, T, P having an event other than MIDI. For example, different kinds of data is sequentially inputted, e.g. MIDI (M) → illustration (P) → text (T) → MIDI (M) → audio (A) → motion image (P) → .... The data assorting section 4 assorts these of data to each reproducing section 11 - 14 on a kind-by-kind basis according to a delta time. Each reproducing section 11-14 carries out a reproducing process of data corresponding thereto.

The data reproduced in the MIDI reproducing section 11 and the data reproduced in the audio reproducing section 12 are mixed together by a mixer 15 and echo-processed by the sound effect section 15a, and thereafter temporarily stored in the output buffer 17 and outputted as a sound from the speaker 19. On the other hand, the data reproduced in the text reproducing section 13 and the data reproduced in the image reproducing section 14 are mixed together by a mixer 16 and subjected to a special image effect or the like in the visual effect section 15a, and thereafter temporarily stored in the output buffer 18 and displayed as visible information on the display 20. Then, when the data assorting section 4 receives a META event for

093605.090701

reproduce stop shown in Fig. 6(b), the reproducing of data is ended.

In this manner, in the data reproducing apparatus of Fig. 1, each of data can be reproduced through assortment on a kind-by-kind basis from a data row mixed with MIDI, audio, text and images. Upon reproducing a text or image, a delta time is referred to similarly to MIDI reproducing so that data is reproduced in the timing dependent upon the delta time. Consequently, by merely describing a delta time, synchronization can be easily made between different kinds of data, such as sound and images. Meanwhile, because there is no need to build clocks in a program for processing each of data as required in the conventional, there occur no problems with synchronization deviation due to the mismatch between the clocks.

Fig. 9 is a flowchart showing a data reproducing method in the reproducing apparatus of Fig. 1, showing a procedure to be executed by the CPU 2. Hereunder, explanation is made on the operation with exemplification that the reproducing apparatus is a reproducing apparatus for communications karaoke. Incidentally, the step of flowchart will be abbreviated "S".

If the data receiving section 3 receives data from a file 1a of a server on a network through a communication line (S101), this received data is stored to the buffer 3a (S102). Next,

the data assorting section 4 reads out the data of the buffer 3a and counts a lapse time from a execution of the immediately preceding event (S103). Then, determination is made as to whether this lapse time coincides with a time represented by a delta time (or exceeds it) (S104). If the delta time is not exceeded (S104 NO), S103 is returned to continue counting of the lapse time. If the lapse time coincides with or exceeds the delta time (S104 YES), a process of data is entered.

In the process of data, a kind of the received data is first determined. Namely, it is determined whether the received data is MIDI data M or not (S105). If it is a MIDI data (S105 YES), this is assorted to the MIDI reproducing section 11 so that a synthesizer sound is created in the MIDI reproducing section 11 (S111). The detailed principle of the same was already described, hence the explanation being omitted herein. Due to sound reproducing by the synthesizer, a karaoke accompanying melody is outputted from the speaker 19.

If the received data is not MIDI data M (S105 NO), then whether audio data A or not is determined (S106). If it is audio data A (S106 YES), this is assorted to the audio reproducing section 12 so that an audio process is carried out in the audio reproducing section 12 thereby reproducing an audio (S112). The detailed principle of the same was already described, the explanation being omitted herein. By reproducing of an audio, a vocal such as a background chorus is outputted from the

09936055.090701

speaker 19.

If the received data is not audio data A (S106 NO), then whether text data T or not is determined (S107). If text data T (S107 YES), this is assorted to the text reproducing section 13 so that a text process is carried out in the text reproducing section 13 thereby reproducing a text (S113). By reproducing of a text, the title or words of karaoke music is displayed on the display 20.

If the received data is not text data T (S107 NO), then whether image data P or not is determined (S108). If image data P (S108 YES), this is assorted to the image reproducing section 14 so that a process for a still image or motion image is carried out in the image reproducing section 14 thereby reproducing an image (S114). By reproducing of an image, a background image such as an animation or motion image is displayed on the display 20.

If the received data is not image data (S108 NO), the same data is for example data concerning setting or control and a predetermined process in accordance with its content is carried out (S109). Subsequently, it is determined whether to stop the reproducing or not, i.e. whether received a META event of Fig. 6(b) or not (S110). In the case the reproducing is not stopped (S110 NO), S101 is returned to wait for receiving the next data. Where stopping the reproducing (S110 YES), the operation is ended.

As in the foregoing, the data reproducing apparatus of Fig. 1 is made as an apparatus adapted for communications karaoke by the provision of the sound reproducing section comprising the MIDI reproducing section 11 and the audio reproducing section 12 and the visual information reproducing section comprising the text reproducing section 13 and the image reproducing section 14. In the invention, the audio reproducing section 12 is not necessarily required but can be omitted. However, by providing the audio reproducing section 12 to reproduce a musical instrument part in the MIDI reproducing section 11 and reproduce a vocal part in the audio reproducing section 12, the vocal part can be reproduced with an inherent sound thus realizing a music play with high a realism feeling.

Incidentally, the SMF-formatted data to be received by the data receiving section 3 is stored in the file 1a of the server on the network as described before. New-piece data is periodically uploaded to the file 1a, to update the content of the file 1a.

Fig. 10 is a flowchart showing a reproducing method in the case where the data reproducing apparatus of Fig. 1 is used in the broadcast of television CM (commercial), showing a procedure to be executed by the CPU 2. In the figure, S121 - S124 correspond, respectively, to S101 - 104 of Fig. 9, wherein the operations thereof are similar to the case of Fig. 9 and

09936055-090701

hence explanation is omitted.

If a predetermined time is reached to enter a process (S124 YES), it is determined whether the received data is data of a music to be played in a background of CM or not (S125). Herein, the data for a back music is configured by MIDI. If background music data (S125 YES), it is assorted to the MIDI reproducing section 11 to carry out a synthesizer process, thereby reproducing a sound (S132). This outputs a CM background music from the speaker 19.

If the received data is not background music data (S125 NO), it is then determined whether it is data for an announcement that an announcer is to talk or not (S126). The announce data is configured by audio data. If it is announce data (S126 YES), it is assorted to the audio reproducing section 12 to carry out an audio process thereby reproducing an audio (S133). By reproducing of an audio, an announcer commentary or the like is outputted from the speaker 19.

If the received data is not announce data (S126 NO), it is then determined whether the data is text data representative of a product name or the like or not (S127). If text data (S127 YES), this is assorted to the text reproducing section 13 so that a text is reproduced in the text reproducing section 13 and displayer on the display 20 (S134).

If the received data is not text data (S127 NO), it is then determined whether the data is illustration data or not

(S128). If illustration data (S128 YES), this is assorted to the illustration reproducing section 14 so that a still image process is carried out in the image reproducing section 14 thereby reproducing an illustration and displaying it on the display 20 (S135).

If the received data is not illustration data (S128 NO), it is then determined whether the data is motion image data or not (S129). If motion image data (S129 YES), this is assorted to the image reproducing section 14 so that a motion image process is carried out in the image reproducing section 14 thereby reproducing a motion image and displaying it on the display 20 (S136).

If the received data is not motion image data (S129 NO), advancement is to S130. S130 and S131 correspond, respectively, to S109 and S110 of Fig. 9 and the operations thereof are similar to Fig. 9, hence explanation being omitted.

In the meanwhile, in the foregoing reproducing method, in reproducing audio, text and image data buried in the SMF-formatted data, there are cases of reproducing the same data with repetition in a certain number of times. For example, there are cases that karaoke background chorus is repeated thrice or the same text are displayed twice in the start and end portions of CM. In such cases, there is a problem of increase in data amount if the data in the number corresponding to the number of times of repetition is buried in the format

0936055.090701



of Fig. 5 or Fig. 7.

Accordingly, the method shown in Fig. 11 is to be considered as a solution to that. Namely, where reproducing the same data R with thrice repetition in the timing of t1, t2 and t3 as in (a), the transmitting side (server) firstly forwards once a packet buried with the data R as in (b). The receiving side (data reproducing apparatus) stores the data R in a memory (not shown). During repetitive reproducing, the transmitting side forwards only a message "Reproduced data Upon Lapse of Time Represented by Delta Time" without forwarding the data R. According to the message, when a predetermined time comes according to the delta time, the receiving side reads the data R out of the memory and reproduces it. By carrying out this operation thrice at t1, t2 and t3, the data amount to be transmitted is satisfactorily reduced to one-third.

Incidentally, although exemplified herein was the case that the transmission data after once stored in a memory was reproduced, the method of Fig. 11 can be applied to the data reception of so-called a stream scheme that data is reproduced while being downloaded. In this case, the data R forwarded at t1 as a first reproducing time point will be stored in the memory.

Fig. 12 is a flowchart showing a repetitive reproducing process described above, which is a detailed procedure in S112, S113 or S114 of Fig. 9 or a detailed procedure in S133, S134,

09936055-090701  
T02060-55093660

S135 or S136 of Fig. 10. First, whether the received data is data R to be repetitively reproduced or not is determined (S141), wherein if not repetitive data (S141 NO), processing is made as usual data. If it is repetitive data (S141 YES), the number of times of repetition is set to a counter N in the CPU (S142) and the data R is read out of the memory (S143) to output it (S144). Next, the counter N is subtracted by 1 thereby updating it into N-1 (S145). Then, whether the counter N has become 0 or not is determined (S146). If not 0 (S146 NO), movement is to S110 of Fig. 9 or S131 of Fig. 10. If the counter N has become 0 (S146 YES), the data R recorded is erased to release the memory (S147).

Fig. 13 is a figure showing a principle of previously forwarding of data in a stream scheme. In the case of forwarding audio or image data following MIDI data, as shown in (a) the amount of data is less in the MIDI portion whereas the amount of data abruptly increases in the portion of audio or image data X. (The reason of less data amount of MIDI is that MIDI is not tone data itself but a command for controlling to generate tone and configured by binary data). Consequently, the data X if directly forwarded requires a great capacity of a communication line.

Accordingly, as shown in Fig. 13(b) the data X is appropriately divided to attach the IDs of X1, X2 and X3 to the divided data. These divisional data is inserted in the

093605.090701  
10/20/06 15:09:26

preceding MIDI data and previously forwarded, thereby making it possible to smoothen the amount of transmission data and reduce the capacity on the line. Although the example of partly dividing the data X was shown herein, the data may be divided throughout the entire section.

The data following the MIDI may be a plurality of coexisting data X, Y as shown in Fig. 14(a). In also this case, the divisional data of the data X and data Y is each given an ID of X1, X2, ... and Y1, Y2, ... on an each-group basis. Fig. 14(b) shows an example that divisional ones of data are inserted between the preceding ones of MIDI data. If a data group having divisional data thus inserted therein is received by the data receiving section 3, the divisional ones of inserted data are extracted from the data group. By combining the extracted ones of divisional data, the former reproduced data is restored. The detail is explained with reference to Fig. 15 and Fig. 16.

The received divisional data is separated from the MIDI data and sequentially stored to the memory in the chronological order of from the top data of Fig. 14(b). The content of the memory is shown in Fig. 15. In an area of each divisional data stored, a start address of a following one of divisional data to be coupled to the relevant divisional data is recorded on the each-group basis of X and Y. For example, a start address of data X2 is recorded in the end of data X1, and a start address of data X3 is recorded in the end of data X2. Also, a start

0936055-090701

address of data Y2 is recorded in the end of data Y1, and a start address of data Y3 is recorded in the end of data Y2.

Fig. 16 is a flowchart showing the operation to extract divisional data and store it to the memory in the case where the data receiving section 3 receives a data group of Fig. 14(b). First, the top data X1 is read in (S151), and the read data X1 is written to the memory (S152). Subsequently, data X2 is read in (S153), whereupon a start address of an area to store the data X2 is written to the end of the data X1 (S154) and then the data X2 is written to the memory (S155). Next, after processing the MIDI data (S156), data Y1 is read in (S157) and the read data Y1 is written to the memory (S158). Thereafter, data X3 is read in (S159) whereupon a start address of an area to store the data X3 is written to the end of the data X2 (S160) and then the data X3 is written to the memory (S161). Subsequently, data Y2 is read in (S162), whereupon a start address of an area to store the data Y2 is written to the end of the data Y1 (S163) and then the data Y2 is written to the memory (S164). From now on, data X4 to data X6 are similarly written to the memory.

By thus recording the start addresses of the following ones of divisional data to the ends of the divisional data stored in the memory, the divisional ones of data can be easily combined for restoration. Namely, concerning the data X, the divisional ones of data X1, X2, ... X6 are coupled in a chain

form through the start addresses. Accordingly, even if the divisional data of the data X and the divisional data of the data Y are mixedly stored as in Fig. 15, the data X1, X2, ... X6 are read out with reference to the start addresses and combined together, the former data X can be easily restored. This is true for the data Y.

Fig. 17 is a figure explaining a process of the audio data having a silent section. For example, consideration is made on the case that the voice of an announcer is recorded as an audio signal and buried in an SMF format of Fig. 5(b) or Fig. 7(b). There possibly are pauses in the midway of announcer's voice. The data in the pause section (silent section) is data unnecessary in nature. Accordingly, if the silent sections of data are cut to bury only the required portions in the SMF format, the amount of data can be reduced.

In the audio signal of Fig. 17, a section T is a silent section. Although the silent section T is a section having inherently a signal level of 0, actually the level is not necessarily limited to 0 because of mixing-in of noise or the like. Accordingly, a level value L in a constant range is fixed so that, where a section that the signal level does not exceed L continues a constant section, this section is given as a silent section T to create audio data the silent sections T are cut away. If this is buried in the SMF format of Fig. 5(b) or Fig. 7(b) and reproduced according to the foregoing reproducing

09936055-090701  
T02060"55092660

method, the amount of transmission data is satisfactorily less and the memory capacity on the receiving side can be economized.

However, by merely cutting away of the silent sections T, during reproducing the signal sharply rises and falls thereby causing noise. In order to avoid this, a fade-in/out process is desirably carried out at around a signal rise and fall to obtain a smooth rise/fall characteristic. The fade-in/out process can be easily realized by a known method using a fade-in/out function. In Fig. 17, W1 - W4 are regions that the fade-in/out process is to be carried out.

Fig. 18 is a flowchart in the case the silent sections are cut away to record the data. Data is read sequentially from the top (S171), and whether the level of the read data exceeds a constant value or not (S172) is determined. If the constant value is not exceeded (S172 NO), S171 is returned to subsequently read the data. If the constant value is exceeded (S172 YES), the foregoing fade-in/out process is carried out at around a rise in the data and the data after the process is written to the memory (S173). The fade-in/out process herein is a fade-in/out process in W1 of Fig. 17, which is a fade-in process that the signal rises moderately.

Next, data is read in again (S174), and whether the level of the read data exceeds a constant value or not is determined (S175). If the constant value is exceeded (S175 YES), the data is written to the memory (S176) and S174 is returned to read

the next data. If the constant value is not exceeded (S175 NO), it is determined whether the section has continued a constant section or not (S177). If not continued a constant section (S177 NO), the data is written to the memory (S176) and S174 is returned to read the next data. If a section a constant level is not exceeded continues a constant section (S177 YES), the section is considered as a silent section so that a fade-in/out process is made in the region W2 in Fig. 17 and the data after the process is written to the memory (S178). The fade-in/out process herein is a fade-out process that the signal falls moderately. Incidentally, in S178 is carried out a process to erase the unnecessary data in the silent sections among the data written in S176.

Next, whether data reading is ended or not is determined (S179). If not ended (S179 NO), S171 is returned to read in the next data. From now on, the similar processes to the above are passed to carry out a fade-in/out process in W3, W4 of Fig. 17. If the data reading is ended (S179 YES), the operation is ended.

In the above embodiment, audio, text and images are taken as information to be buried in an SMF extended format. However, the burying information may be anything, e.g. a computer program is satisfactory. In this case, if a computer program is provided to be reproduced following MIDI data, how to use is feasible such that a music according to the MIDI is first

09936055 090701  
102055509660

played and, when this is ended, the program is automatically run.

Also, although the above embodiment showed the example that data is received from a file 1a of a server on a network through a communication line, it is satisfactory to create SMF-type data on a personal computer and store it in a file 1b on the hard disk so as to download the data therefrom.

Fig. 19 shows another example of a data reproducing apparatus according to the invention. 1a, 1b are files on which data is recorded. 1a is, for example, a file in a server on the Internet, and 1b is, for example, a file on a hard disk within the apparatus.

2 is a CPU for controlling the overall of the data reproducing apparatus, which is configured including a data receiving section 3 and a data assorting section 4. Although besides these the CPU 2 includes the blocks having various functions, they in the invention are not related and omittedly shown. The data receiving section 3 accesses the files 1a, 1b to receive the data stored in these. The data of the file 1a is received through a wire or wirelessly. The format of the data to be received is the same as Fig. 2 to Fig. 8. These of received data are temporarily stored in a buffer 3a. The data assorting section 4 assort the data received by the data receiving section 3 on a kind-by-kind basis and stores them in the buffers 7 - 10 constituting a storage section 5.

0938055.090701



6 is a data reproducing section configured with a MIDI reproducing section 11 for processing the data concerning MIDI, an audio reproducing section 12 for processing the data concerning audio, a text reproducing section 13 for processing the data concerning text, and an image reproducing section 14 for processing the data concerning images. Incidentally, although not shown, the MIDI reproducing section 11 has a sound-source ROM 11a of Fig. 1. The image reproducing section 14 has a function to reproduce still images and motion images.

15 is a mixer for mixing the outputs of the MIDI reproducing section 11 and audio reproducing section 12, and 16 is a mixer for mixing the output of the text reproducing section 13 and image reproducing section 14. Although herein not shown, the mixer 15 has a sound-effect section 15a of fig. 1 while the mixer 16 has a visual-effect section 16a of Fig. 1. 17 is an output buffer to temporarily store the output of the mixer 15, and 18 is an output buffer to temporarily store the output of the mixer 16. 19 is a speaker as a sound generating section to output sound on the basis of the data of the output buffer 17, and 20 is a display for displaying visual information, such as characters and illustrations, on the basis of the data of the output buffer 18. 21 is a timing control section for generating a system clock providing a reference time to control the timing of each section, and 22 is an external storage device to be externally attached to the data reproducing apparatus.

The storage section 5, the data reproducing section 6, the mixers 15, 16, the output buffers 17, 18 and the timing control section 21 are configured by a DSP (Digital Signal Processor). The above sections can be configured by a LSI, in place of the DSP.

As apparent from a comparison between Fig. 19 and Fig. 1, the data reproducing apparatus of Fig. 19 has a storage section 5 comprising buffers 7 - 10 between the data assorting section 4 and the data reproducing section 6, and also has a timing control section 21. Furthermore, an external storage device 22 is also added.

Fig. 20 is a flowchart showing the overall operation of the data reproducing apparatus of Fig. 19. First, the data receiving section 3 receives data from the file 1a or file 1b (S181). This received data is stored to the buffer 3a. Next, the CPU 2 carries out a time operation required for data assortment by the data assorting section 4 on the basis of the system clock from the timing control section 21 and delta time of each of data received by the data receiving section 3 (S182). The detail of S182 will be hereinafter referred to. The data assorting section 4 assort the data to be processed on a kind-by-kind basis depending upon a result of time operation, and stores them to the corresponding buffers 7 - 10 (S183). The detail of S183 will also be hereinafter referred to.

The data stored in the buffer 7 - 10 is read out by the

data reproducing section 11 - 14 corresponding to each buffer so that the event recorded in the data is executed in each data reproducing section 11 - 14 thereby reproducing the data (S184). The detail of S184 will be hereinafter referred to. Among the reproduced data, the data of MIDI and audio is mixed in the mixer 15 while the data of text and images is mixed in the mixer 16 (S185). These of mixed data are respectively stored in the output buffers 17, 18 and thereafter outputted to the speaker 19 and the display 20 (S186).

Fig. 21 is a figure explaining a principle of time operation in S182. In the figure,  $t$  is a time axis and an event 0 to event 4 show the timing of reproducing an event included in a received data row (it should be noted that this reproducing timing represents a timing in the case that the received data is assumed to be reproduced according to a delta time thereof, instead of representing an actually reproduced timing on the time axis  $t$ ). For example, the event 0 is an image event, the event 1 is a MIDI event, the event 2 is an audio event, the event 3 is a text event, and the event 4 is an image event.  $\Delta T_1$  to  $\Delta T_4$  are a delta time, wherein  $\Delta T_1$  is a delta time of the event 1,  $\Delta T_2$  is a delta time of the event 2,  $\Delta T_3$  is a delta time of the event 3, and  $\Delta T_4$  is a delta time of the event 4. As in the foregoing, the delta time is a time of from a time point of executing the immediately preceding event to an execution of the current event. For example, the event 2 is executed upon

elapsing  $\Delta T_2$  from the time point of executing the event 1, and the event 3 is executed upon elapsing  $\Delta T_3$  from the time point of executing the event 2.  $t_1$  represents a time that the last-time data has been processed, and  $t_2$  a current time. The difference  $t_2 - t_1$  corresponds to one frame as a unit section. This one-frame section has a time width, for example, of 15 ms. The first and last timings in one frame are determined by the system clock from the timing control section 21 (see Fig. 19).  $Q$  is a data processing section, which is defined as a difference between a current time  $t_2$  and an execution time  $t_0$  of the last event in a frame preceded by one (event 0).

Fig. 22 is a flowchart showing a procedure of data assortment by the data assorting section 4. Hereunder, explanation is made on the procedure of assorting data, with reference to Fig. 21 and Fig. 22. In the timing  $t_2$  of Fig. 21, if there is a clock interrupt from the timing control section 21 to the CPU 2, the system becomes a WAKE state (S191) so that the CPU 2 operates a time width of a process section  $Q$  (S192). This  $Q$ , as in the foregoing, is calculated as:

$$Q = t_2 - t_0,$$

which represents a time width for processing the current data. Next, the CPU 2 sequentially reads a delta time  $\Delta T$  of the received data (S193) to determine whether the time width of the process section  $Q$  is equal to or greater than  $\Delta T$  or not (S194). If  $Q \geq \Delta T$  (S194 YES), data kind determinations are next made

in order (S195, S198, S200, S202), thereby the data is assorted and stored to the buffers 7 - 10 provided corresponding to the respective ones of data (S196, S199, S201, S203). Thereafter,  $Q = Q - \Delta T$  is operated to update the value of  $Q$  (S197).

In the example of Fig. 21, because the event 0 has been already processed in the last time, determination is made in order from the event 1. Concerning the delta time  $\Delta T_1$  of the event 1, because of  $Q > \Delta T_1$ , the determination in S194 is YES and next whether the data is MIDI or not is determined (S195). In Fig. 21, if the event 1 is a MIDI event (S195 YES), the data is forwarded to and temporarily stored in the buffer 7 (S196). If the event 1 is not a MIDI event (S195 NO), whether an audio event or not is determined (S198). If the event 1 is an audio event (S198 YES), the data is forwarded to and temporarily stored in the buffer 8 (S199). If the event 1 is not an audio event (S198 NO), whether a text event or not is determined (S200). If the event 1 is a text event (S200 YES), the data is forwarded to and temporarily stored in the buffer 9 (S201). If the event 1 is not a text event (S200 NO), whether an image event or not is determined (S202). If the event 1 is an image event (S202 YES), the data is forwarded to and temporarily stored in the buffer 10 (S203). If the event 1 is not an image event (S202 NO), another process is carried out.

In this manner, the data of the event 1 is assorted to any of the buffers 7 - 10, and thereafter  $Q = Q - \Delta T_1$  is operated

09936055.090701

(S197). Returning to S193, a delta time  $\Delta T2$  of the next event 2 is read to determine  $Q \geq \Delta T2$  (S194). Although the value of  $Q$  at this time is  $Q = Q - \Delta T1$ , because  $Q - \Delta T1 > \Delta T2$  in Fig. 21, the determination in S194 is YES. Similarly to the above, data kind determinations of the event 2 are made for assortment into the corresponding buffers.

Thereafter,  $Q = Q - \Delta T2$  is operated (S197). Returning to S193, a delta time  $\Delta T3$  of the next event 3 is read to determine  $Q \geq \Delta T3$  (S194). Although the value of  $Q$  at this time is  $Q = Q - \Delta T1 - \Delta T2$ , because of  $Q - \Delta T1 - \Delta T2 > \Delta T3$  in Fig. 21, the determination in S194 is YES. Similarly to the above, data kind determinations of the event 3 are made for assortment to the corresponding buffers.

Thereafter,  $Q = Q - \Delta T3$  is operated (S197). Returning to S193, a delta time  $\Delta T4$  of the next event 4 is read (Although in Fig. 21 the event 4 is shown later than  $t2$ , the data of the event 4 at a time point  $t2$  has already entered the buffer 3a and is possible to read out) to determine  $Q \geq \Delta T4$  (S194). Although the value of  $Q$  at this time is  $Q = Q - \Delta T1 - \Delta T2 - \Delta T3$ , because of  $Q - \Delta T1 - \Delta T2 - \Delta T3 < \Delta T4$  in Fig. 21, the determination in S194 is NO. The CPU 2 does not carries out data processing of the event 4 but enters a SLEEP state to stand by until the process in the next frame (S204). Then, if there is a clock interrupt in the first timing of the next frame from the timing control section 21, a WAKE state is entered (S191), whereby the

data of the event 4 and the subsequent are processed similarly to the foregoing process.

In the flowchart of Fig. 22, S192 - S194 and S197 are the details of S182 of Fig. 20, and S195, S196 and S198 - S203 are the details of S183 of Fig. 20.

Next, explanation is made on the detail of each data reproducing section 11 - 14, i.e. the detail of S184 of Fig. 20. Fig. 23 is a flowchart showing a process procedure in each data reproducing section, wherein (a) represents a process procedure in the MIDI reproducing section 11. In the MIDI reproducing section 11, when the data of one-frame section assorted by the data assorting section 4 is stored to the buffer 7, this data is read in the next one-frame section (S211). Then, the content of a MIDI event recorded in the read data (see Fig. 3, Fig. 4) is decrypted to create a synthesizer sound by a software synthesizer (S212). The output of the synthesizer is temporarily stored in a not-shown buffer present within the MIDI reproducing section 11, and outputted to the mixer 15 from this buffer (S213).

Fig. 23(b) shows a process procedure in the audio reproducing section 12. In the audio reproducing section 12, when the data of one-frame section assorted by the data assorting section 4 is stored to the buffer 8, this data is read in the next one-frame section (S311). Then, the audio data recorded in an event of the read data (see Fig. 5(b), Fig. 7(b))





carried out according to a sequence determined by a program, herein assumably carried out in the sequence of (a) to (d). Namely, the MIDI process of (a) is first made. If this is completed, the audio process of (b) is entered. If the audio process is completed, the text process of (c) is entered. If the text process is completed, the image process of (d) is made. Incidentally, the reason of carrying out the processes in a series fashion is that the DSP constituting the storage section 5, the data reproducing section 6 and the like is one in the number. Where a DSP is provided in each reproducing section, the process can be made in a parallel fashion.

The MIDI reproduced data outputted to the mixer 15 in S213 and the audio reproduced data outputted to the mixer 15 in S313 are mixed together in the mixer 15 and stored to the output buffer 17, thereby being outputted as a sound from the speaker 19. Also, the text reproduced data outputted to the mixer 16 in S413 and the image reproduced data outputted to the mixer 16 in S513 are mixed together in the mixer 16 and stored to the output buffer 18, thereby being displayed as a visible information on the display 20. The output buffer 17 and the speaker 19 constitute a first output section, while the output buffer 18 and the display 20 constitute a second output section. Incidentally, the output buffer 17 has a function to count the number of the data to be outputted to the speaker 19. On the basis of this count value, the output buffer 17 supplies a

09936055 090701

control signal to the timing control section 21. The timing control section 21 supplies a timing signal (system clock) to the CPU 2 on the basis of the control signal. Namely, the time required in outputting the data of one in the number from the output buffer 17 is determined by a sampling frequency. If this time is given  $\tau$ , the time required in outputting the data of  $N$  in the number is  $N \times \tau$ . Accordingly, the timing can be determined by a value of  $N$ . Meanwhile, the timing control section 21 supplies the timing signal also to the output buffer 18 according to the control signal, to control the timing of the data to be outputted from the output buffer 18.

Fig. 24 is a figure showing in an overall fashion the foregoing operation of from data assortment to reproducing, wherein (a) represents a relationship between an amount of data to be processed in each reproducing section and a frame section and (b) represents a relationship between a process time in each reproducing section and a frame section. F1 - F3 are one-frame sections, wherein the time width of each frame section is set, for example, at 15 ms. Namely, the data assorting section 4 is interrupted by a clock at a time interval of 15 ms from the timing control section 21.  $t$  represents a time axis,  $M$  a reproducing timing of a MIDI event,  $A$  a reproducing timing of an audio event,  $T$  a reproducing timing of a text event and  $P$  a reproduce timing of an image event. Incidentally, these reproducing timing show the timings on the assumption that the

093605.090701

received data be reproduced according to a delta time similarly to Fig. 21, instead of showing the timings that actual reproducing is made on the time axis  $t$ .

As was explained in Fig. 21, the data to be processed in a section F1 is assorted and stored to the buffers 7 - 10 in the last timing of the same section. Each reproducing section 11 - 14 reads data from the buffer in the next one-frame section F2 to carry out a reproducing process. In this case, the amount of data to be transferred from each buffer to each reproducing section is data in an amount that each reproducing section can process in the one-frame section. As shown in Fig. 24(a), each reproducing section is made to process all the data within the next one-frame section F2.

The time chart of this process is Fig. 24(b), wherein the length of a white arrow represents a process time. The process time is different depending on each frame. As in the foregoing, the data stored in the buffer, in the next one frame section F2, is sequentially read out in a predetermined order by each reproducing section 11 - 14, so that in each reproducing section an event recorded in the data is executed thereby reproducing the data. In Fig. 24(b), M (MIDI), A (audio) and P (image) are reproduce-processed in this order. The reproduced M and A are processed in a mixer 1 (mixer 15 in Fig. 19) while the reproduced P is processed in a mixer 2 (mixer 16 in Fig. 19). In this manner, the data assorted in the section F1 is all completed in process

within the section F2. The remaining time is a standby time before starting a process in a section F3. This is shown by SLEEP in the figure. The output from the mixer 1 is stored in an output buffer 1 (output buffer 17 in Fig. 19) and thereafter outputted as a sound in the next frame section F3. Meanwhile, the output from the mixer 2 is stored to an output buffer 2 (output buffer 18 in Fig. 19) and thereafter outputted as visible information in the frame section F3.

Similarly, in the section F2, the data A, M, T is assorted to the buffer. These of data are read out in the order of M, A and T in the section F3, reproduce-processed in the same procedure as the above in each reproducing section and outputted in the next section F4 (not shown in Fig. 24).

In the above manner, in the data reproducing apparatus of Fig. 19, the received data is assorted on a frame-by-frame basis and stored to the buffer, and read out from the buffer in the next frame to reproduce the data, and outputted as a sound or visible information in the further next frame. Accordingly, reproducing can be made while taking time synchronization of data on a frame-unit basis.

Meanwhile, the data assorting section 4 is devoted itself to the operation of assorting the received data to the buffers 7 - 10, and each reproducing section 11 - 14 is devoted itself to reading out and reproducing the data stored in the buffer. Accordingly, it is possible to make the data received by the

data receiving section 3 into a pipeline form and process it at high speed.

Incidentally, in reproducing data, the timing of reproducing should be primarily controlled according to delta time. However, in the apparatus of Fig. 19, after data is assorted to the buffers 7 - 10 by the data assorting section 4, the data is separated and hence the individual delta time has substantially insignificance in determining a reproducing timing. However, because one frame section as above is an extreme short time of 15 ms, it is satisfactory to consider that the data reproduced in this duration have been simultaneously reproduced regardless of the reproducing timing of each of data. Actually, it is empirically ascertained that the deviation in data reproducing timing within a section of nearly 15 ms cannot be distinguished by a usual human sense. Accordingly, upon assorting data if deciding data that is to be processed within one frame section on the basis of delta time, there is no problem even where, within one frame section, the reproducing timing of the data is deviated from the reproducing timing according to delta time.

Furthermore, it is satisfactory that the order of reproducing different kinds of data be changed within the same frame section. For example, although each reproducing section reads data from the buffer according to the order of M, A and P of the received data in the F1 section of Fig. 24(b), in the

09936055-090701

section F2 the order the reproducing sections reads data out of the buffers is M, A and T, i.e. A and M exchanged despite the order of received data is A, M and T. This is because, as described before, the process order in each reproducing section is fixed as M, A, T and P by a program. However, even if the process order is changed in this manner, if each reproducing section carries out data processing within 15 ms, there is no problem because the reproducing timing of data is not known by a human sense as described before.

Meanwhile, although in Fig. 24 the data assorted in the one frame section is all processed within the next one frame section, this is not essentially required. Namely, if the output buffers 17, 18 have a size exceeding the processing amount in one frame section, even where there is data having not been processed within the one frame, the earlier-processed data is left in the output buffers 17, 18 and hence the data can be outputted without suspension.

Fig. 25 is a figure explaining the operation of the data receiving section 3 where a stream scheme for carrying out reproducing while downloading data in the data reproducing apparatus of Fig. 1 or Fig. 19. Herein, a buffer 3a is configured by three buffers of buffer A, buffer B and buffer C. 3b is registers A, B, C corresponding to the buffers A, B, C. The data to be received is shown as stream data S. The stream data S has a header H recorded at its top. Following this, MIDI,

09936055-090701

audio, text and images of data are mixedly recorded as packets P1, P2, P3, ... Pm. The total data amount of the stream data S is given K.

Hereunder, explanation is made on the receiving operation with an example in the case of reproducing music. When the data receiving section 3 starts to receive stream data S from the file 1a due to access to the server, the data A1 in an amount corresponding to a buffer A size (capacity) is first stored from the top of the stream data S to the buffer A. This makes the buffer A full in state, to set the register A with a flag representative of a full state of the buffer A. Subsequently, the data B1 in an amount corresponding to a size of the buffer B is stored to the buffer B. This makes also the buffer B full in state, to set the register B with a flag representative of a full state of the buffer B.

At a time point that the buffer B become full, the data assorting section 4 start to assort data thereby transferring the data A1 stored in the buffer A and the data B1 stored in the buffer B to the buffer 7 - 10 on a kind-by-kind basis of data. The transferred data is reproduced by each reproducing section 11 - 14, starting music to play. On the other hand, the data C1 is stored to the buffer C in an amount corresponding to the size thereof. This makes the buffer C full in state, to set the register C with a flag representative of a full state of the buffer C.

093605.090701  
1070605509260

During storage of data C1 in the buffer C, if the data A1 of the buffer A is consumed to make the buffer A empty, a flag of the register A is reset. The data receiving section 3 acquires the next data A2 and stores it to the buffer A. This makes the buffer A again in a full state, to set a flag in the register A. Meanwhile, if the data B1 of the buffer B is consumed to make the buffer B empty, a flag of the register B is reset. The data receiving section 3 acquires the next data B2 (not shown in Fig. 25) and stores it to the buffer B. This makes the buffer B again in a full state, to set a flag in the register B. By repeating the above operation, the reproducing of stream data S proceeds. Fig. 26 is a figure showing a flow of data in this case.

In the above stream scheme, reproducing is possible to start from a timepoint of receiving the data A1. However, where the transfer capacity of the data to be fetched to the buffer is insufficient, after a reproduce start the data supply to the buffer does not catch up with consumption thus causing a phenomenon of discontinuity in sound. Accordingly, in order to avoid this, there is a need of caching data to the buffer to start reproducing at a time point a certain degree of data is saved. This will be explained on an example of Fig. 27.

Assuming in Fig. 27 that the buffers A, B, C are respectively in size of 50 K-bits and the time required in fetching data to the buffer is 5 seconds, the data transfer



capacity per second is given  $50/5 = 10$  K-bps. Meanwhile, assuming that a music-playing time of is 10 seconds and the total data amount is 200 K-bits, the amount of data consumed by playing the music is  $200/10 = 20$  K-bps. Consequently, the reproducing if started at a time point  $t_0$  of receiving data makes the amount of consumed data in excess of the amount of data fetched to the buffer, resulting in insufficient data in the buffer and discontinuity in sound.

This problem is to be solved as follows. Namely, 50 K-bits of data A1 is stored to the buffer A in 5 seconds from a time point  $t_0$  of receiving data, and 50 K-bits of data B1 is stored to the buffer B in the subsequent 5 seconds. The data of totally 100 K-bits is cached for 10 seconds. Then, reproducing is started at a time point  $t_1$  that 10 seconds have passed from a data-reception time point  $t_0$ . By doing this, even if the data transfer capacity after a reproduce start is smaller than the amount of data consumption, the buffers A, B are already saved with 100 k-bits of data. Also, because the remaining 100 k-bits of data (the total of C1 and A2) can be fetched to the buffers C, A for 10 seconds of from the music-play start time point  $t_1$  to the music-play end time point  $t_2$ , there encounters no data exhaustion and hence the music can be reproduced continuously to the end.

Contrary to this, where the amount of data to be taken to the buffer exceeds the amount of consumed data, the data

09936055-090701  
102060-55093660

cache as above is not required. However, there is a need, at a time the buffer becomes a full state, of providing an instruction to the server from the data receiving section 3 not to transmit further data. In this case, when the data of the buffer is consumed to cause an empty in the buffer, the data receiving section 3 will acquire data from the server.

The foregoing is generalized to describe as the following. Assuming that the buffer size is  $U$  and the time required in fetching data to the buffer is  $t$ , the data transfer capacity per unit time is given  $J = U/t$ . Meanwhile, the total data amount is  $K$  and the reproducing time is  $T$ , the data consumption amount  $E$  per unit time is given  $E = K/T$ . In Fig. 25, the total data amount  $K$  and the music-play time  $T$  is recorded in the header  $H$ , so that the data receiving section 3 calculates a data consumption amount  $E$  by reading the header  $H$ . Also, at a time that data  $A1$  is fetched to the buffer  $A$ , the data transfer capacity  $J$  is calculated. As a result, if  $J < E$ , it is determined that data cache is required thereby caching a required amount of data. In this case, if data is cached, with a data cache amount of  $C$ , to meet the condition of

$$K < C + J \cdot T,$$

then it is possible to reproduce the data without discontinuity. In order to cache data, the data receiving section 3 acquires data  $B1$  from the server and store it to the buffer  $B$ . If the above condition is fulfilled at this time point, the data

receiving section 3 forwards a ready signal to the data assorting section 4. Receiving this, the data assorting section 4 starts to assort the data to the buffers A, B. The operation from then on is as per the foregoing.

On the other hand, if  $J > E$ , data cache is not required. Consequently, the data assorting section 4 starts to assort the data at a time of receiving the data A1. However, because the buffer immediately becomes full in state after a start of reproducing, the data receiving section 3 requests the server to stop the transmission of data at a time the buffer becomes a full state. Then, if the data is consumed to cause a free space in the buffer, the data receiving section 3 again requests the server to transmit data. Namely, the data receiving section 3 intermittently acquires data from the server.

In the above manner, the data receiving section 3 monitors the data transfer capacity J. If  $J < E$ , data is cached in a required amount and thereafter reproducing is started. If  $J > E$ , data cache is not made to carry out reproducing while intermittently receiving data. This makes it possible to stably reproduced data, regardless of variation in transmission line capacity. Incidentally, in the case of  $J = E$ , data cache is not necessary so that data is continuously received from the server.

Herein, if the transmission line capacity is suddenly decreased due to a certain cause, the data cache to the buffer

0936055.090701  
T02020.5509360

is possibly insufficient resulting in an empty state in all the buffers A, B, C. In this case, a mute signal is forwarded from the data assorting section 4 to the MIDI reproducing section 11 and audio reproducing section 12 to prohibit noise from being outputted, thereby eliminating an uncomfortable feeling to the user. Also, it is preferred to forward a front-end hold signal from the data assorting section 4 to the text reproducing section 13 and image reproducing section 14 thereby maintaining an on-screen display immediately before. Also, in place of these, where no data comes from the data assorting section 4 despite each reproducing section 11 - 14 has not receive a signal representative of data end, it is also possible to adopt a method that a mute or front-end hold process is automatically made in each reproducing section 11 - 14 to resume reproducing if data comes.

In the above explanation, although independent three buffers A, B, C were provided as the buffer 3a, this is mere one example and the number of buffers can be arbitrarily selected. Also, a ring buffer may be used in place of the independent buffers.

Next, explanation is made on application examples of the invention. The data reproducing apparatus of Fig. 1 or Fig. 19 can be mounted on an information terminal having a function of a telephone. Due to this, realized is a cellular phone that can download a variety of information, such as sound, text and

0936055.090701

images, and reproduce them to produce sound through the speaker or display text or images on the display. For example, the CMs (commercials) or music and images, such as of karaoke, offered by the Internet can be viewed on the cellular phone. An example of such a cellular phone is shown in Fig. 37.

In Fig. 37, 50 is a cellular phone as an information terminal and 51 is a main body of the phone, wherein the main body 51 is provided with an antenna 52, a display 53, various keys such as a numeric key 54, a speaker 55 and a microphone 56. This cellular phone 50 communicates with a base station 73, to download the data stored in a server 72 through the base station 73.

The antenna 52 is to transmit and receive signals to and from the base station 73. The display 53 is structured by a color liquid crystal display and the like, to display telephone numbers, images and so on. From the speaker 55 as a sound generating section is to be heard a voice of the opposite of communication or a melody. The microphone 56 is to input speech during communication or in preparing an in-absence guide message.

54 is a numeric key comprising numerals 0 - 9, which is used to input a telephone number or abbreviated number. 57 is a power key for turning on/off power to the phone, 58 is a talk key to be operated upon starting a talk, and 59 is a scroll key for scrolling the content displayed on the display 53. 60 is

09936055.090701

a function key for achieving various functions by the combined operation with another key, 61 is an invoking key for invoking a content registered and displaying it on the display 53, and 62 is a register key to be operated in registering abbreviated dial numbers, etc. 63 is a clear key for erasing a display content or the like, and 64 is an execute key to be operated in executing a predetermined operation. 65 is a new-piece display key for displaying a list of new pieces in downloading the music data from the server 72, 66 is an in-absence recording key to be operated in preparing an in-absence guide message, 67 is a karaoke key to be operated in playing karaoke, 68 is a music-play start key for starting a music play, 69 is a music-play end key for ending a music play.

Meanwhile, 70 is a small-sized information storage medium in the form of a card, a stick or the like which is removably attached in a slot (not shown) provided in the phone main body 51. This information storage medium 70 incorporates therein a flash memory 71 as a memory device. A variety of data downloaded is stored in this memory 71.

In the above structure, the display 53 corresponds to the display 20 of Fig. 1 or Fig. 19, to display a text or image herein. For example, in the case of CM, text, illustrations, pictures, motion pictures or the like are displayed. In the case of karaoke, titles, words, background images are displayed. Meanwhile, the speaker 55 corresponds to the speaker 19 of Fig.

1 or Fig. 19, to output sound of MIDI or audio from here. For example, in the case of CM, CM songs or item guide messages are sounded. In the case of karaoke, accompaniment melodies or back choruses are sounded. In this manner, by mounting the data reproducing apparatus of Fig. 1 or Fig. 19 on the cellular phone 50, the cellular phone 50 can be utilized, for example, as a karaoke apparatus.

Meanwhile, MIDI data only can be downloaded from the server 72 onto the cellular phone 50. In this case, if a melody created by the MIDI is outputted as an incoming tone from the speaker 55, the incoming tone will be an especially realistic, refined music. Also, if different music of MIDI data is stored correspondingly to incoming tones to an internal memory (not shown) of the cellular phone 50 to notify with different melodies depending upon an incoming tone, it is possible to easily distinguish from whom the call is. Meanwhile, an incoming-call-notifying vibrator (not shown) built in the cellular phone 50 may be vibrated on the basis of MIDI data, e.g. the vibrator is vibrated in the same rhythm as a drum. Furthermore, such a use way is possible as to add BGM (BackGround Music) due to MIDI to in-absence guide messages.

The information storage medium 70 corresponds to the external storage device 22 of Fig. 19, which can store and save music data or image data in the flash memory 71. For example, where downloading CD (Compact Disk) music data, as was shown

09936055-090701

in Fig. 38 the information storage medium 70 itself can be made as a CD by recording CD-jacket picture data due to images in addition to music data due to MIDI or audio, data of music words and commentaries and the like due to text. This is true for the case of MD (Mini Disk).

In the cellular phone 50 mounted with the data reproducing apparatus as above, for example where there is an incoming call during viewing CM, it is desired to preferentially output an incoming tone. Fig. 28 shows a configuration for realizing this. The apparatus of Fig. 28 is also to be mounted on a cellular phone 50, wherein the identical parts to Fig. 19 are attached with the identical reference numerals. In Fig. 28, the difference from Fig. 19 is in that an incoming-signal buffer 23 is provided and a switch section 24 is provided between the buffer 7 and the MIDI reproducing section 11.

Fig. 29 is a time chart showing the operation of the data reproducing apparatus of Fig. 28. It is assumed that, first, a CM music is sounded as in (c) from the speaker 19 while a CM image is displayed as in (d) on the display 20. Now, provided that an incoming-call signal as in (a) is inputted as an interrupt signal to the data receiving section 3, the data receiving section 3 stores the data of the incoming-call signal to the buffer 23 and switches the switching section 24 from a buffer 7 to buffer 23 side. This inputs the data of the buffer

09936055-090701



23 in place of the data of the buffer 7 to the MIDI reproducing section 11. The MIDI reproducing section 11 reads the data of the buffer 23 to create an incoming tone by the software synthesizer and outputs it to the speaker 19 through the mixer 15 and output buffer 17. As a result, a MIDI incoming tone in place of the CM music is outputted as in (b) from the speaker 19. Then, when the incoming of signal is ended to cease the incoming tone, a CM music is again sounded as in (c) from the speaker 19. Incidentally, the CM image is continuously displayed on the display 20 as in (d) regardless of the presence or absence of an incoming tone. In this manner, according to the data reproducing apparatus of Fig. 28, when there is an incoming signal, a incoming tone is preferentially outputted thus enabling the viewer to positively know the signal incoming. Also, in creating an incoming tone, because the software synthesizer of the MIDI reproducing section 11 can be commonly used, the process is simplified.

The data reproducing apparatus of the invention can be mounted, for example, on an information terminal having a function of game machine besides on an information terminal having a function of telephone. The game machine may be a game exclusive machine or an apparatus possessing both game and other functions. For example, satisfactory is the cellular phone 50 shown in Fig. 37 installed with software of a game.

In a game machine alike this, although, usually, music

sounds in the background during progress of a game, an interesting game development is available if an effect sound due to MIDI is produced over a back music to the on-screen situation. Fig. 30 is a configuration for realizing this, wherein the identical parts to Fig. 9 is attached with the identical reference numerals. In Fig. 30, the difference from Fig. 19 lies in that an effect-sound signal buffer 25 is provided and a mixer 26 is provided between the buffer 7 and the MIDI reproducing section 11.

Fig. 31 is a time chart showing the operation of the apparatus of Fig. 30. It is assumed that, first, a back music sounds as in (c) from the speaker 19 and a game image is displayed as in (d) on the display 20. Now, provided that an effect-sound signal as in (a) is inputted as an interrupt signal to the data receiving section 3 by operating a particular button of the game machine, the data receiving section 3 stores the data of the effect sound signal to the buffer 25. The effect-sound data of the buffer 25 is mixed with the data of the buffer 7, in the mixer 26. The MIDI reproducing section 11 reads the data of the mixer 26, creates an effect sound in addition to the back music by the software synthesizer, and outputs these onto the speaker 19 through the mixer 15 and output buffer 17. As a result, an effect sound due to MIDI (e.g. explosion sound) as in (b) is outputted from the speaker 19. During ringing of this effect sound, the back music

continuously sounds as in (c). Then, if the effect-sound signal ends, the effect sound from the speaker 19 ceases resulting in sounding of the back music only. Incidentally, the game image is continuously displayed on the display 20 as in (d). In this manner, according to the data reproducing apparatus of Fig. 30, a game machine can be realized which is capable of ringing an effect sound due to MIDI over a back music. Also, because the software synthesizer of the MIDI reproducing section 11 can be commonly used in creating an effect sound, the process is simplified.

The use of the data reproducing apparatus of the invention can realize a system having various functions besides the above. Fig. 32 to Fig. 34 are one example of the same, showing an example that a given benefit is provided to the persons who have viewed a particular CM on the Internet. Each of data of MIDI, audio, text and images is mixed in CM information in a chronological fashion, as in Fig. 33. Consequently, a tag describing URL (Uniform Resource Locator) as shown in Fig. 34 is inserted in the last part of text data (broken lines Z). In the tag, "XXX" in the last is information representative of what CM it is.

Explaining according to a flowchart of Fig. 32, the viewer first downloads CM data from a file 1a (see Fig. 1, Fig. 19) in a server on the Internet (S601). This CM data is received by the data receiving section 3, assorted to each section by

0936055-090701

the data assorting section 4, and reproduced by the foregoing procedure and outputted from the speaker 19 and display 20. Herein, if the text data received is reproduced to the last by the text reproducing section 13, a tag shown in 34 is read out (S602).

Subsequently, a browser (perusal software) is started up (S603), and jump is made to a homepage of a URL described in the read-out tag (S604). The server jumped to (not shown) interprets the "XXX" part of the tag to determine as to what CM has been viewed (S605), and in case that a product of the CM is purchased over the network, to carry out a process, for example, of charge at a rate discounted by 20% (S606). Thus, according to the above system, discount service can be offered to the persons who have viewed the CM.

Fig. 35 and Fig. 36 is another application example using the data reproducing apparatus of the invention, showing an example of providing ticket discount service to a person who has purchased music data over the Internet. In this case, the music data is added with words, music commentary, introduction of players or the like as text data, wherein a tag as shown in Fig. 36 is inserted in the last part of the text data. In the tag, "from = 2000/08/15 to = 2000/09/15" represents that the ticket available term is from August 15, 2000 to September 15, 2000. Meanwhile, "YYY" in the last is the information representative of what the purchased music data is.

Explaining according to a flowchart of Fig. 35, the viewer first downloads music data from a file 1a in a server on the Internet (S701). The music data is received by the data receiving section 3 and assorted by the data assorting section 4 to each section, followed by being reproduced in the foregoing procedure and outputted from the speaker 19 and display 20. Also, each of data is stored to and saved in the external storage device 22 (in Fig. 37, information storage medium 70). Herein, if the received text data is reproduced to the last in the text reproducing section 13, the tag shown in Fig. 36 is read out (S702).

Subsequently, a browser is started up (S703), to determine the current date is within the available term or not (S704). This determination is made by making reference to the available term described in the foregoing tag. If within the available term (S704 YES), jump is made to a homepage of the URL described in the read-out tag (S705). If not within the available term (S704 NO), nothing is done for end (S708).

The server jumped to (not shown) interprets the "YYY" part of the tag to determine what music data has been purchased (S706), and transmits a guide message that a ticket of a concert by the musical artist is to be purchased at a discount price thus displaying the message on the display 20 (S707). Therefore, according to the above system, it is possible to induce the person who has purchased music data to purchase a ticket.

## INDUSTRIAL APPLICABILITY

The data reproducing apparatus of the present invention can be mounted on an information terminal in various kinds, such as a personal computer and an Internet-TV STB (Set Top Box) besides the foregoing cellular phone or game machine.

0935055.090701

09/936055

## CLAIMS

1. (Amended) A data reproducing apparatus for receiving and reproducing data including event information and time information for executing an event, the data reproducing apparatus comprising:

a data receiving section capable of receiving a plurality of kinds of data having event information different in attribute;

a data assorting section for making reference to time information of each of data received by said data receiving section and assorting respective ones of data on a kind-by-kind basis each time a timing of executing an event of each data comes;

a data reproducing section provided correspondingly to kinds of data and for executing an event recorded in data assorted by said data assorting section thereby reproducing the relevant data; and

an output section for outputting respective ones of data reproduced by said data reproducing section.

2. A data reproducing apparatus according to claim 1, wherein the plurality of kinds of data comprise first data having MIDI event information and second data having event information of other than MIDI.

3. A data reproducing apparatus according to claim 2, wherein the second data includes data having text event information and data having image event information.

ART 34 AMDT

09936055.090701

4. A data reproducing apparatus according to claim 3, wherein the second data further includes data having audio event information.

5. (Deleted)

6. (Amended) A data reproducing apparatus for receiving and reproducing data including event information and time information for executing an event, the data reproducing apparatus comprising:

a data receiving section capable of receiving data having MIDI event information, data having text event information and data having image event information;

a data assorting section for making reference to time information of each of data received by said data receiving section and assorting respective ones of data on a kind-by-kind basis each time a timing of executing an event of each data comes;

a data reproducing section provided correspondingly to kinds of data and for executing an event recorded in data assorted by said data assorting section thereby reproducing the relevant data;

a first output section for outputting, as a sound, MIDI data reproduced by said data reproducing section; and

a second output section for outputting, as visible information, text and image data reproduced in said data reproducing section.

09936055.090701

END 34-ANDT



7. A data reproducing apparatus according to claim 6, wherein said data receiving section is further capable of receiving data having audio event information, said first output section outputting, as a sound, MIDI and audio data reproduced by said data reproducing section.

8. A data reproducing apparatus according to claim 7, having

a first mixer for mixing MIDI and audio data reproduced by said data reproducing section, and

a second mixer for mixing text and image data reproduced by said data reproducing section, wherein

said first output section outputs data mixed by said first mixer,

said second output section outputting data mixed by said second mixer.

9. (Amended) A data reproducing method for receiving and reproducing data including event information and time information for executing an event, the data reproducing method comprising:

a step of receiving first data having MIDI event information and second data having event information of other than MIDI;

a step of making reference to time information of each of received data and assorting respective ones of data on a kind-by-kind basis each time a timing of executing an event

0936055.090701

177 3541

of each data comes;

a step of reproducing assorted data due to execution of events recorded therein; and

a step of outputting respective ones of reproduced data.

10. (Deleted)

11. (Deleted)

12. (Deleted)

13. (Deleted)

14. (Deleted)

15. (Amended) A data reproducing apparatus for receiving and reproducing data including event information and time information for executing an event, the data reproducing apparatus comprising:

a data receiving section capable of receiving a plurality of kinds of data having event information different in attribute;

a data assorting section for sequentially making reference to time information of each of data received by said data receiving section to determine data to be processed within a unit section having a predetermined time width and assorting, for each unit section, the relevant data on a kind-by-kind basis;

a storage section for temporarily storing data assorted by said data assorting section on a kind-by-kind basis;

a data reproducing section provided correspondingly to kinds of data and for sequentially reading out, in a next unit section, data at each unit section stored in said storage section

09936055.090701

ART 34 AMDT

and executing an event recorded in each of data thereby reproducing the data; and

an output section for outputting respective ones of data reproduced by said data reproducing section.

16. A data reproducing apparatus according to claim 15, wherein said data assorting section assorts, for storage to said storage section, the data to be processed on a kind-by-kind basis in a last timing of a unit section,

said data reproducing section sequentially reading out, in a next unit section, data at the unit section assorted by said data assorting section to execute an event of the relevant data.

17. A data reproducing apparatus according to claim 16, wherein the time information is a delta time defined as a time of from an execution time point of a last-time event to an execution of an event in this time,

said data assorting section calculating a time width of a process section that this-time data is to be processed from a difference between a time at present as a time at the last in a unit section and an execution time of a last event in a unit section precedent by one, and assorting and storing, into storage section, unit-section data such that a sum of a delta time of each event in the relevant process section is fallen within a range of the time width,

said data reproducing section reproducing unit-section

0936055-090701

ART 34 AMDT

data assorted by said data assorting section in a next unit section having a same time width as the relevant unit section.

18. A data reproducing apparatus according to any of claims 15 to 17, wherein provided is a timing control section for controlling timings at a start and end of the unit section.

19. A data reproducing apparatus according to claim 18, wherein said output section has a function to count the number of output data to forward a control signal to said timing control section depending upon a count value thereof, said timing control section outputting a timing signal depending upon the control signal.

20. (Amended) A data reproducing method for receiving and reproducing data including event information and time information for executing an event, the data reproducing method comprising:

a step of receiving a plurality of kinds of data having event information different in attribute;

a step of making reference to time information of each of received data to determine data to be processed within a unit section having a predetermined time width, and assorting, for each unit section, the relevant data on a kind-by-kind basis for temporary storage to a storage section;

a step of sequentially reading out, in a next unit section, data at each unit section stored in said storage section and executing an event recorded in the relevant data thereby

093605.090701

ART C-1111

reproducing the data; and

a step of outputting respective ones of reproduced data.

21. A data reproducing apparatus for reproducing, while downloading, stream data according to claim 1 or 15, wherein

said data receiving section has a buffer,

said data receiving section calculating a data transfer capacity J per unit time and a data consumption amount E per unit time on the basis of data first received,

where  $J < E$ , reproducing is started after caching an required amount of data to said buffer, while where  $J > E$ , reproducing being made while intermittently receiving data without carrying out caching.

22. A information terminal mounted with a data reproducing apparatus according to claim 1 or 15, wherein various kinds of data are to be downloaded, the information terminal including a sound generating section for outputting sound on the basis of downloaded data and a display for displaying a text and image on the basis of the downloaded data.

23. (Deleted)

24. (Deleted)

25. (Deleted)

26. (Amended) An information terminal according to claim 22, wherein a small-sized information storage medium is to be attached and detached, to store downloaded MIDI music data, text words data and image jacket data to said information storage

0936055-090701

AST 64-4837

medium.

27. (Amended) A data reproducing apparatus according to claim 3, wherein commercial information including text is to be received, the text data including an URL to be jumped to upon starting up a browser of the Internet and information for offering service to a homepage viewer of the URL.

28. (Added) An information terminal according to claim 22, wherein

having a cellular-phone function of outputting speech voice from said sound generating section and displaying a telephone number on said display, and

an accompaniment music being outputted from said sound generating section and displaying words and a background image being displayed on said display depending on downloaded data thereby making possible to utilization as a karaoke apparatus.

0936055.090701

ART 34 ANDY

FIG. 1

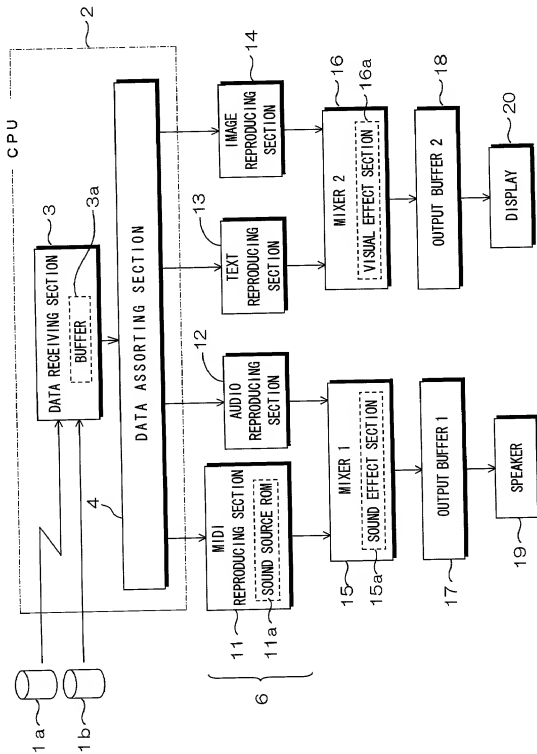


FIG. 2




FIG. 3

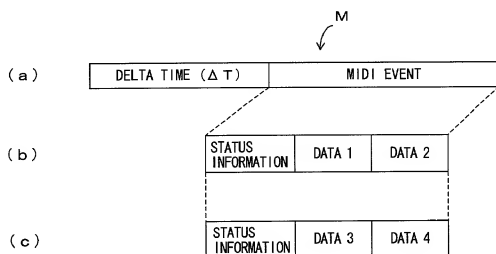


FIG. 4






FIG. 5

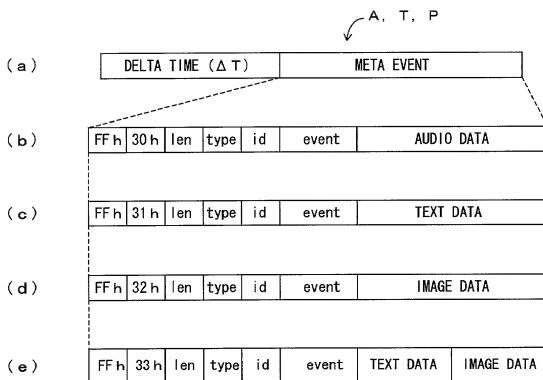


FIG. 6

(a) REPRODUCING START

FF h	10 h	len	type	id
------	------	-----	------	----

(b) REPRODUCING STOP

FF h	11 h	len	type	id
------	------	-----	------	----

FIG. 7

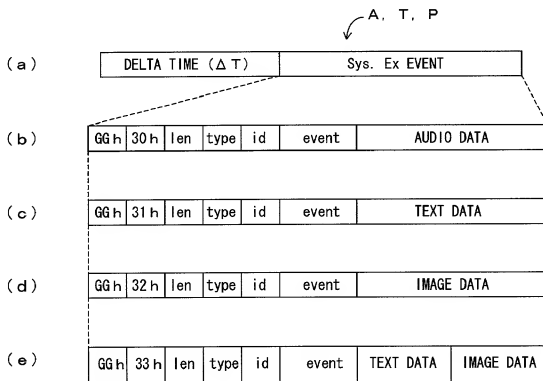


FIG. 8




FIG. 9

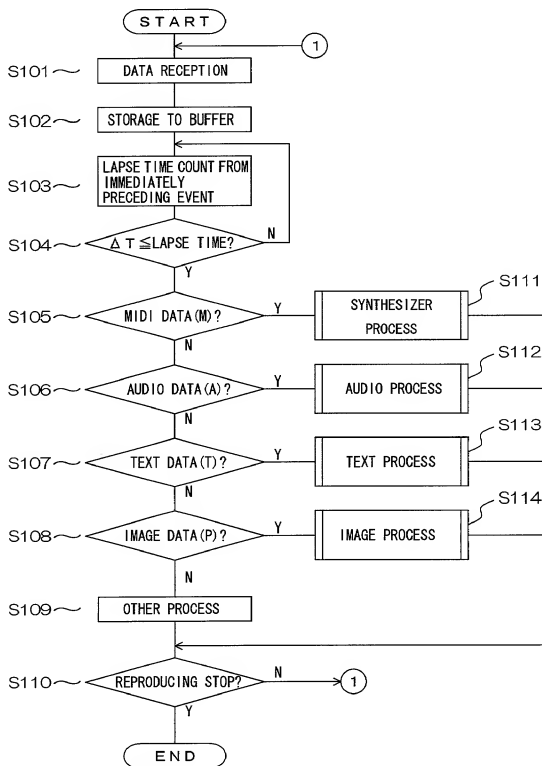


FIG. 10

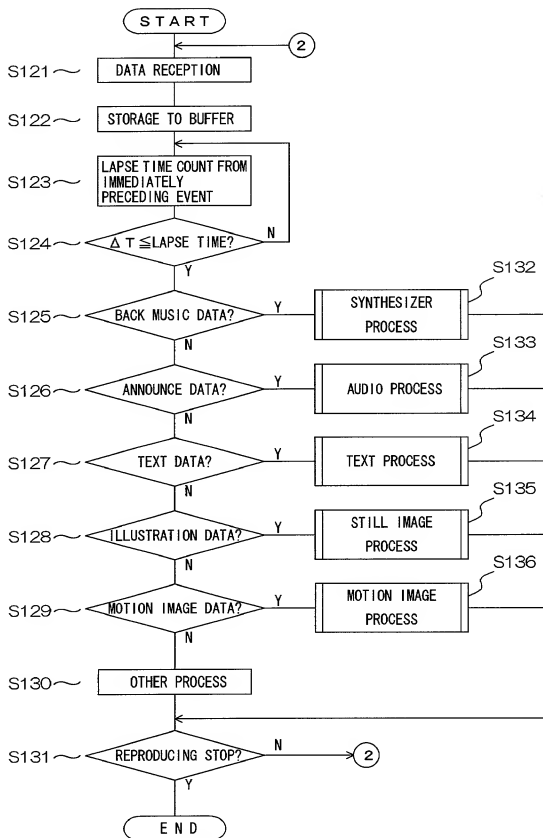


FIG. 11

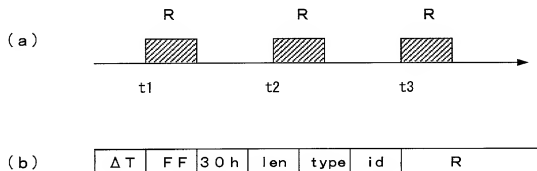


FIG. 12

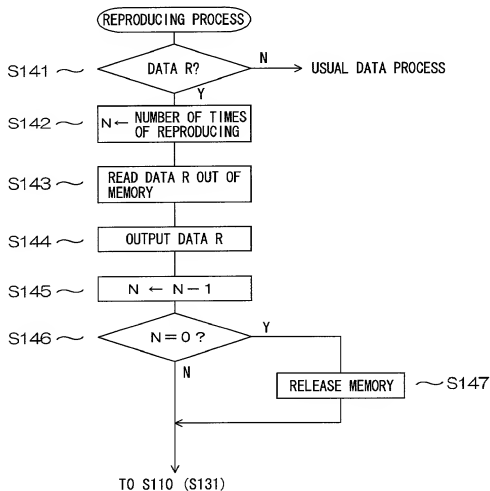


FIG. 13

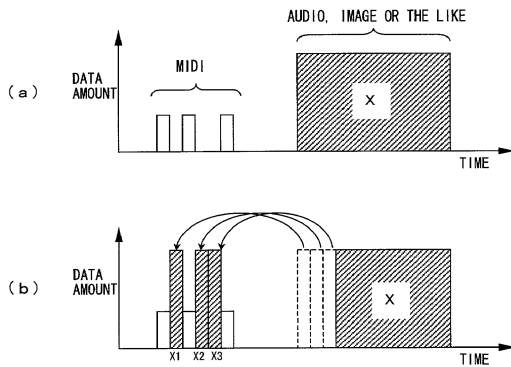


FIG. 14

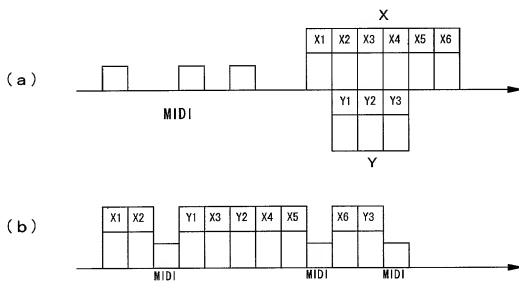


FIG. 15

X 1	X 2 STARTING ADDRESS
X 2	X 3 STARTING ADDRESS
Y 1	Y 2 STARTING ADDRESS
X 3	X 4 STARTING ADDRESS
Y 2	Y 3 STARTING ADDRESS
X 4	X 5 STARTING ADDRESS
⋮	⋮

FIG. 16

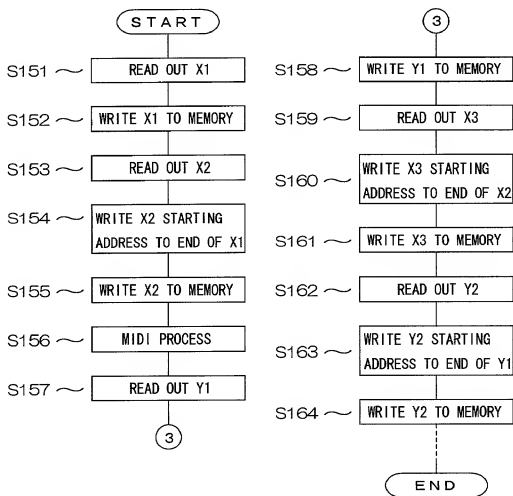


FIG. 17

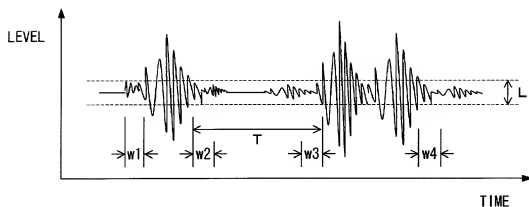


FIG. 18

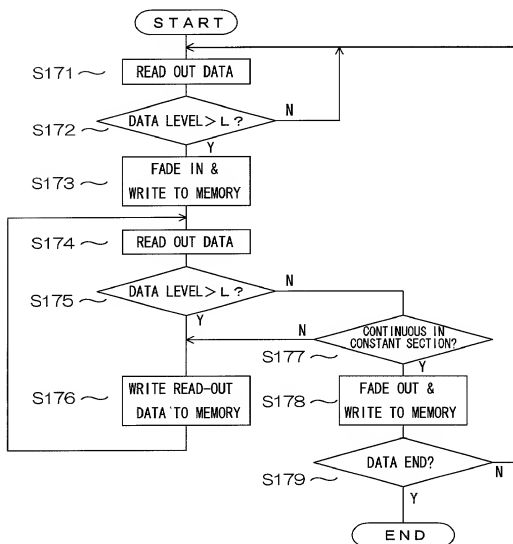




FIG. 19

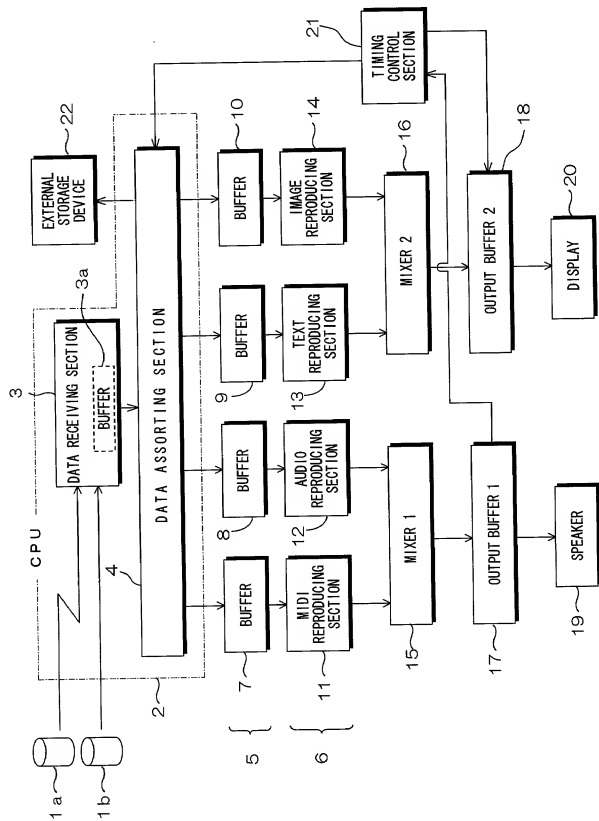


FIG. 20

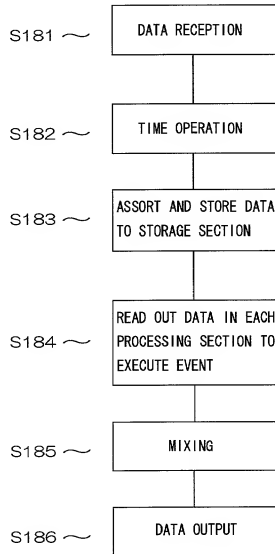


FIG. 21


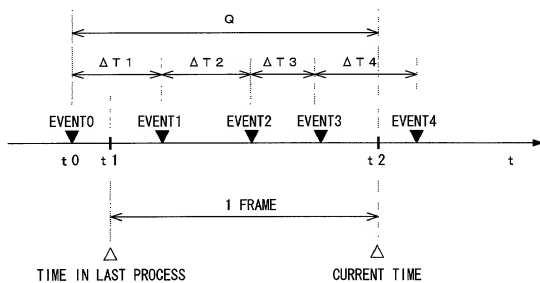


FIG. 22

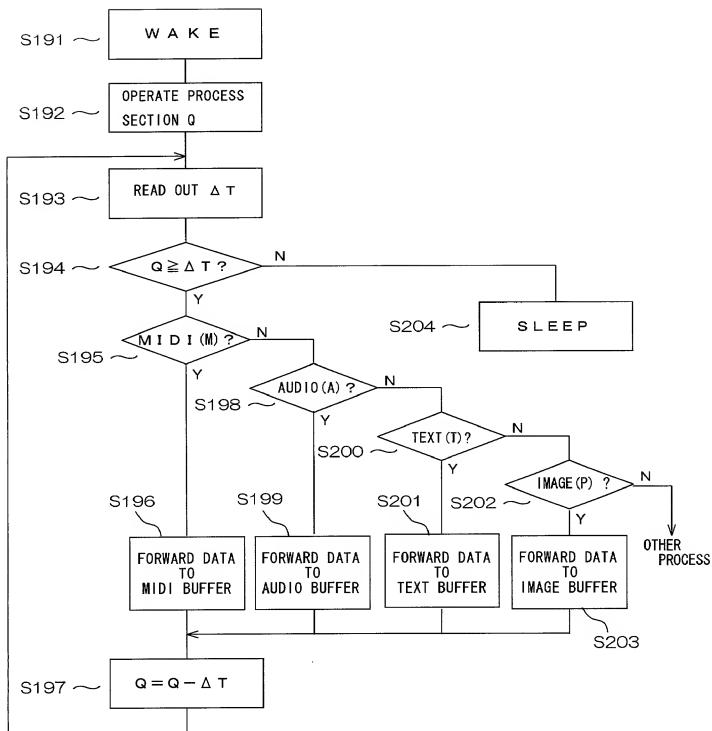

00936055.000701

FIG. 23


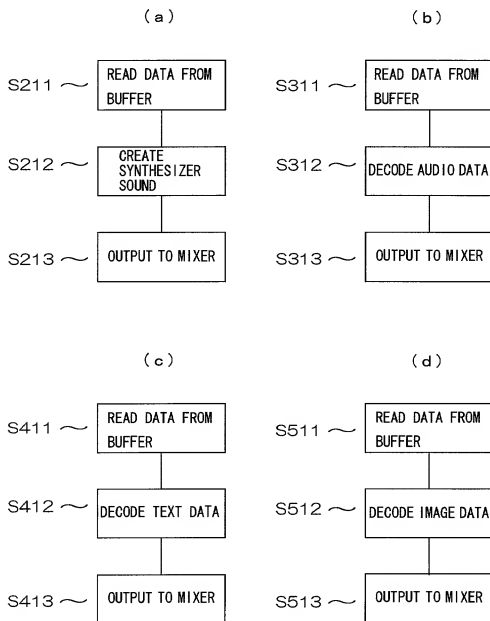


FIG. 24

(a)

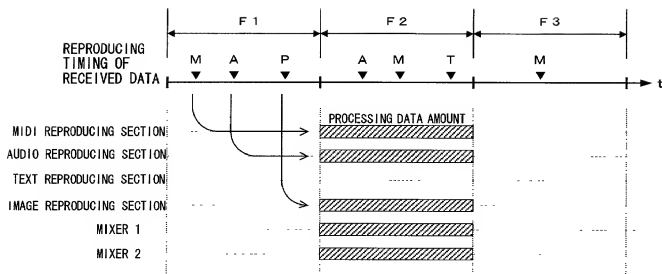

(b)

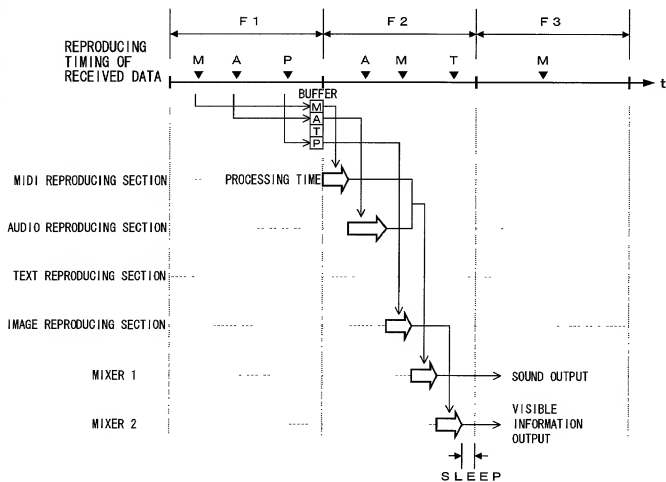


FIG. 25

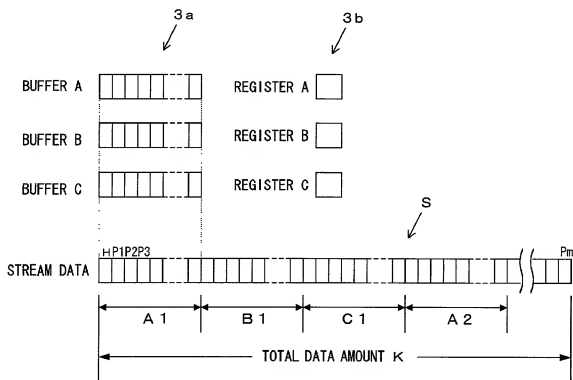


FIG. 26

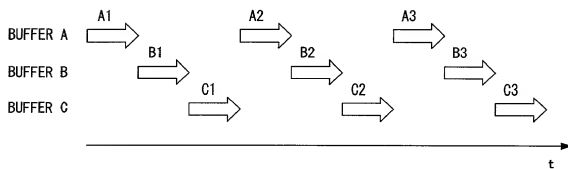


FIG. 27

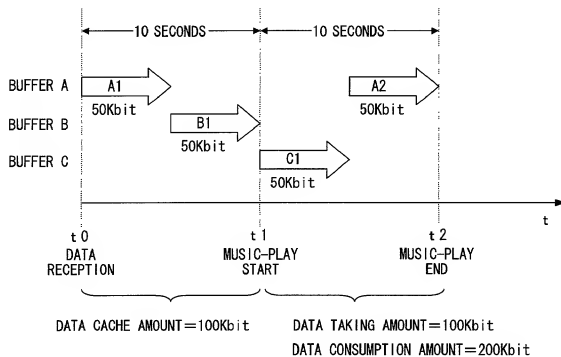




FIG. 28

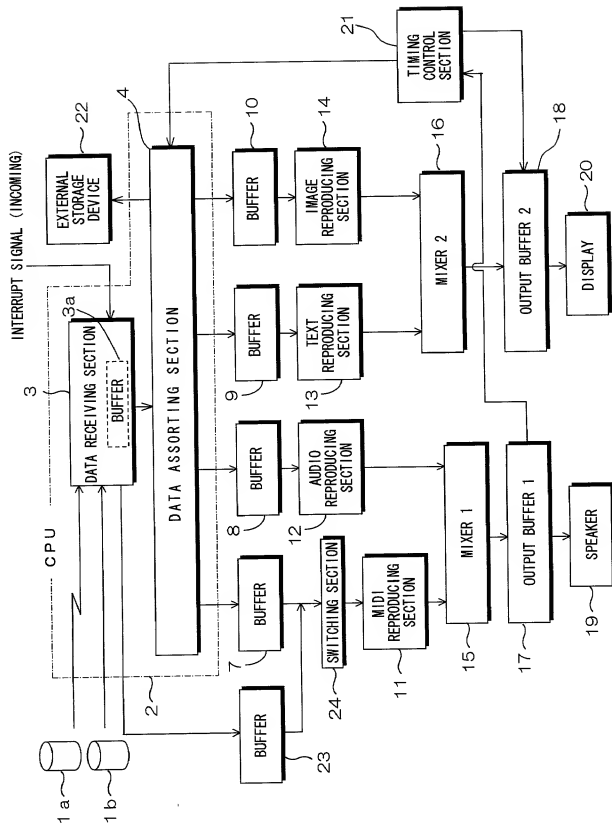


FIG. 29

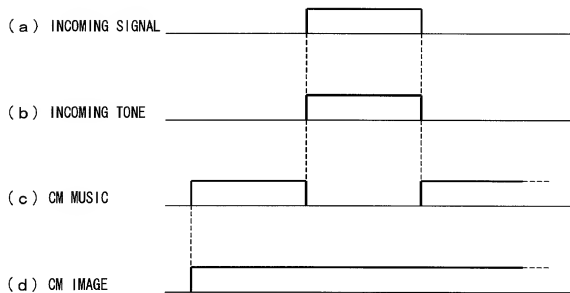


FIG. 30

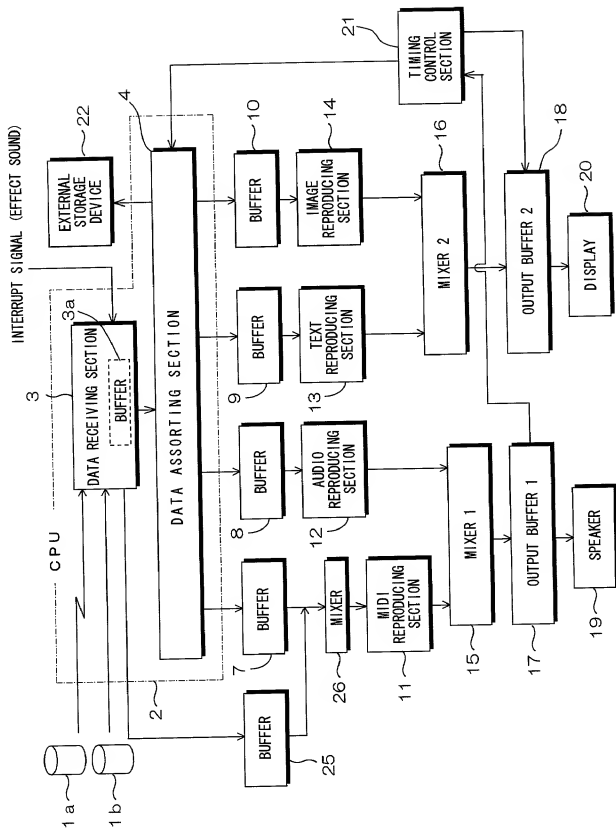


FIG. 31


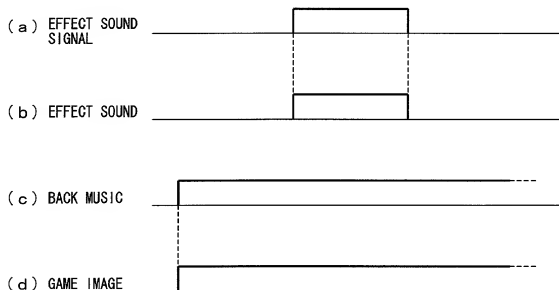


FIG. 32

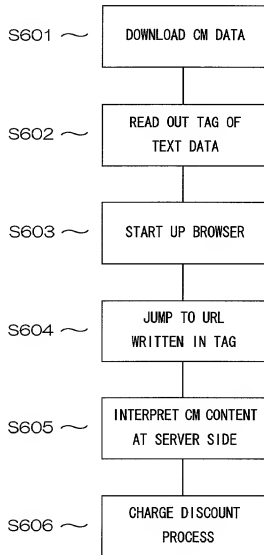

09936055.090701

FIG. 33

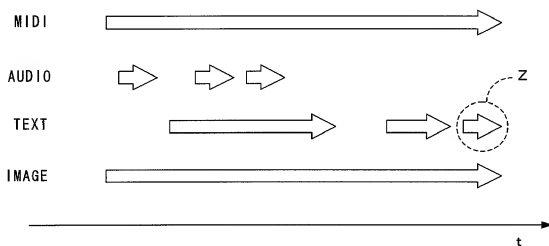


FIG. 34

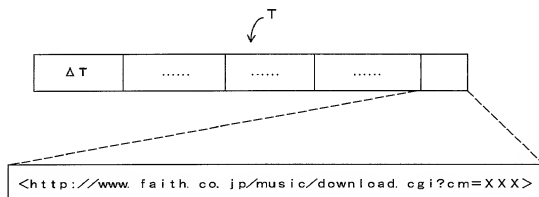


FIG. 35

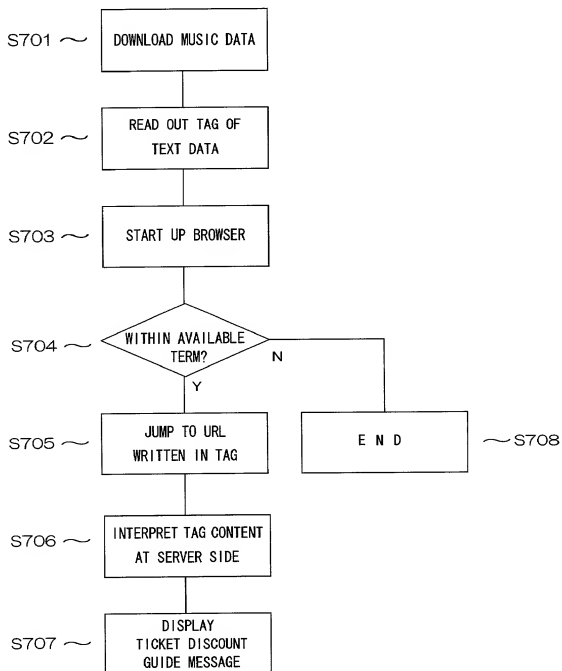


FIG. 36

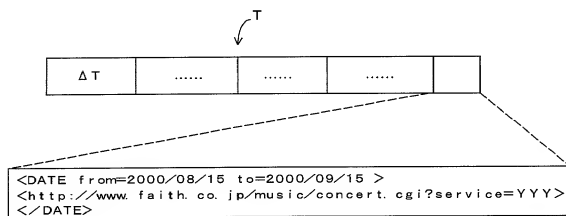




FIG. 37

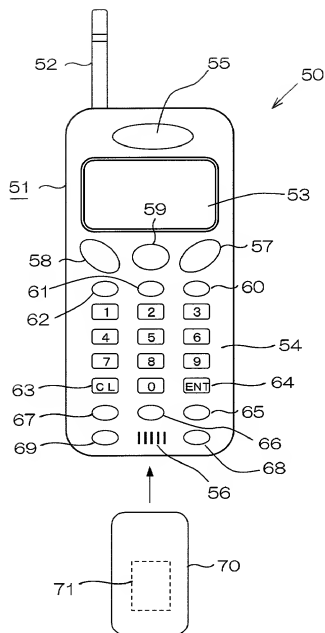


FIG. 38





FIG. 39

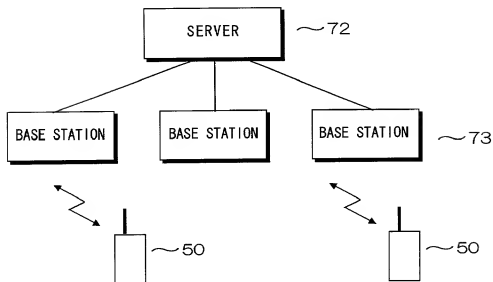

## Attorney Docket No.

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Metkile	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Donald J. Daley	(Reg. No. 34,313)
John W. Bailey	(Reg. No. 32,881)	John A. Castellano	(Reg. No. 35,094)
Gary D. Yacura	(Reg. No. 35,416)		

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP**or **Customer No. 2292**

P.O. Box 747 □ Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 □ Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE  
THE  
FOLLOWING:  
↓

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First  
or Sole Invention  
Inventor  
Insert Name This  
Document is Signed  
Insert Residence  
Insert Citizenship  
Insert Post Office  
Address

GIVEN NAME/FAMILY NAME Yoshiyuki Majima	INVENTOR'S SIGNATURE <i>Yoshiyuki Majima</i>	DATE* 8. Aug. 2001
Residence (City, State & Country) Inasa-gun, Shizuoka-ken, Japan	CITIZENSHIP Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) 1580-36 Kanasashi, Inasa-cho, Inasa-gun, Shizuoka-ken, Japan		

Full Name of Second  
Inventor, if any  
see above

GIVEN NAME/FAMILY NAME Shinobu Katayama	INVENTOR'S SIGNATURE <i>Shinobu Katayama</i>	DATE* 8. Aug. 2001
Residence (City, State & Country) Hamamatsu-shi, Shizuoka-ken, Japan	CITIZENSHIP Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) 915 Irino-cho, Hamamatsu-shi, Shizuoka-ken, Japan		

Full Name of Third  
Inventor, if any  
see above

GIVEN NAME/FAMILY NAME Hideaki Minami	INVENTOR'S SIGNATURE <i>Hideaki Minami</i>	DATE* 8. Aug. 2001
Residence (City, State & Country) Tokyo, Japan	CITIZENSHIP Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) 3-16-5-507 Minami-Ohi, Shinagawa-ku, Tokyo, Japan		

Full Name of Fourth  
Inventor, if any  
see above

GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)	CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		

Full Name of Fifth  
Inventor, if any  
see above

GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)	CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		

## BIRCH, STEWART, KOLASCH &amp; BIRCH, LLP

P.O. Box 747 D Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 ☐ Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING

# COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DATA REPRODUCING APPARATUS, DATA REPRODUCING METHOD AND INFORMATION TERMINAL

Insert Title:

Fill in Appropriate  
Information -  
For Use Without  
Specification  
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on \_\_\_\_\_ as

United States Application Number \_\_\_\_\_

and amended on \_\_\_\_\_ (if applicable) and/or

the specification was filed on \_\_\_\_\_ as PCT

International Application Number \_\_\_\_\_ and was

amended under PCT Article 19 on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

Insert Priority  
Information:  
(if appropriate)

60919/1999

Japan

03/08/1999

☒ Yes

☐ No

(Number)

(Country)

(Month/Day/Year Filed)

☐ Yes

☐ No

(Number)

(Country)

(Month/Day/Year Filed)

☐ Yes

☐ No

(Number)

(Country)

(Month/Day/Year Filed)

☐ Yes

☐ No

(Number)

(Country)

(Month/Day/Year Filed)

☐ Yes

☐ No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

Insert Provisional  
Application(s):  
(if any)

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Country

Application Number

Date of Filing (Month/Day/Year)

Insert Requested  
Information:  
(if appropriate)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.  
Application(s):  
(if any)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)